

# Feature learning, neural networks and backpropagation

Mengye Ren

(Slides credit to David Rosenberg, He He, et al.)

NYU

Nov 19, 2024

# Today's lecture

- Neural networks: huge empirical success but poor theoretical understanding
- Key idea: representation learning
- Optimization: backpropagation + SGD

# Feature engineering

- Many problems are non-linear

# Feature engineering

- Many problems are non-linear
- We can express certain non-linear models in a linear form:

$$f(x) = w^T \phi(x). \quad (1)$$

# Feature engineering

- Many problems are non-linear
- We can express certain non-linear models in a linear form:

$$f(x) = w^T \phi(x). \tag{1}$$

- Note that this model is not linear in the inputs  $x$  — we represent the inputs differently, and the new representation is amenable to linear modeling

# Feature engineering

- Many problems are non-linear
- We can express certain non-linear models in a linear form:

$$f(x) = w^T \phi(x). \quad (1)$$

- Note that this model is not linear in the inputs  $x$  — we represent the inputs differently, and the new representation is amenable to linear modeling
- For example, we can use a feature map that defines a kernel, e.g., polynomials in  $x$

$$x, x^2, x^3, \dots$$

# Decomposing the problem

- Example: predicting how popular a restaurant is

Raw features #dishes, price, wine option, zip code, #seats, size, rating



$$w \cdot (\text{zipcode} == 10019) = \text{popularity}$$

$$\textcircled{w} \cdot \text{rating} = \text{popularity}$$

# Decomposing the problem

- Example: predicting how popular a restaurant is

Raw features #dishes, price, wine option, zip code, #seats, size

- Decomposing the problem into subproblems:

- $h_1$ ([#dishes, price, wine option]) = food quality

- $h_2$ ([zip code]) = walkable

- $h_3$ ([#seats, size]) = noisy

$h_4$ (rating, # of ratings) = direct predictor



# Decomposing the problem

- Example: predicting how popular a restaurant is  
Raw features #dishes, price, wine option, zip code, #seats, size
- Decomposing the problem into subproblems:
  - $h_1$ ([#dishes, price, wine option]) = food quality
  - $h_2$ ([zip code]) = walkable
  - $h_3$ ([#seats, size]) = noisy
- Each intermediate models solves one of the subproblems

# Decomposing the problem


- Example: predicting how popular a restaurant is  
Raw features #dishes, price, wine option, zip code, #seats, size
- Decomposing the problem into subproblems:
  - $h_1$ ([#dishes, price, wine option]) = food quality
  - $h_2$ ([zip code]) = walkable
  - $h_3$ ([#seats, size]) = noisy
- Each intermediate models solves one of the subproblems
- A final *linear* predictor uses the **intermediate features** computed by the  $h_i$ 's:

$$\underline{w_1} \cdot \text{food quality} + \underline{w_2} \cdot \text{walkable} + \underline{w_3} \cdot \text{noisy} = \text{popularity}$$

# Perceptrons as logical gates

- Suppose that our input features indicate light at a two points in space (0 = no light; 1 = light)
- How can we build a perceptron that detects when there is light in both locations?


$$\underline{w_1 = 1}, \underline{w_2 = 1}, \theta = 2$$

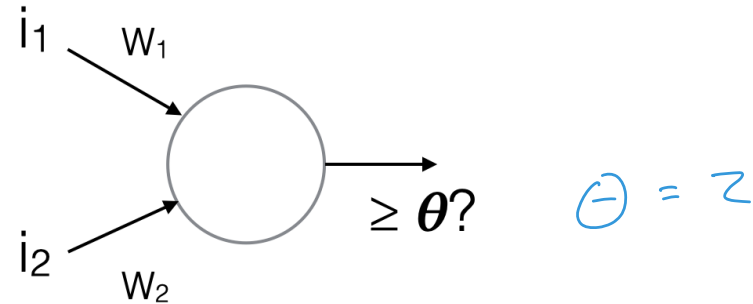

$i_1$	$i_2$	$w_1 i_1 + w_2 i_2$	
0	0	0	
0	1	1	←
1	0	1	←
1	1	2	←

# Limitations of a perceptrons as logical gates


- Can we build a perceptron that fires when the two pixels have the same value ( $i_1 = i_2$ )?

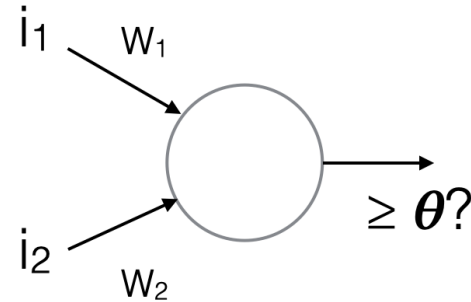

Positive: (1, 1) (0, 0)

$$\begin{aligned} w_1 + w_2 &\geq \theta, & 0 &\geq \theta \\ w_1 < \theta, & & w_2 < \theta \end{aligned}$$


Negative: (1, 0) (0, 1)

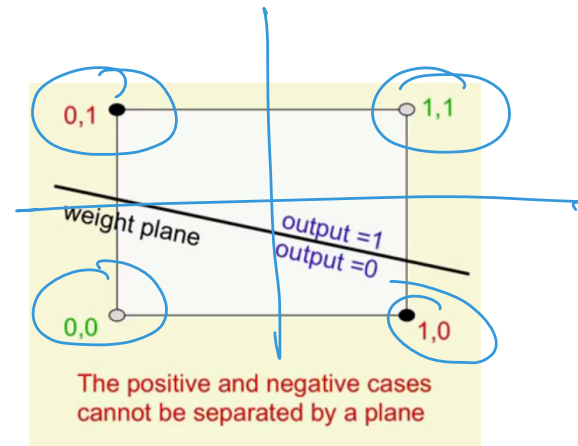

If  $\theta$  is negative, the sum of two numbers that are both less than  $\theta$  cannot be greater than  $\theta$

# Multilayer perceptron

- Fire when the two pixels have the same value ( $i_1 = i_2$ )

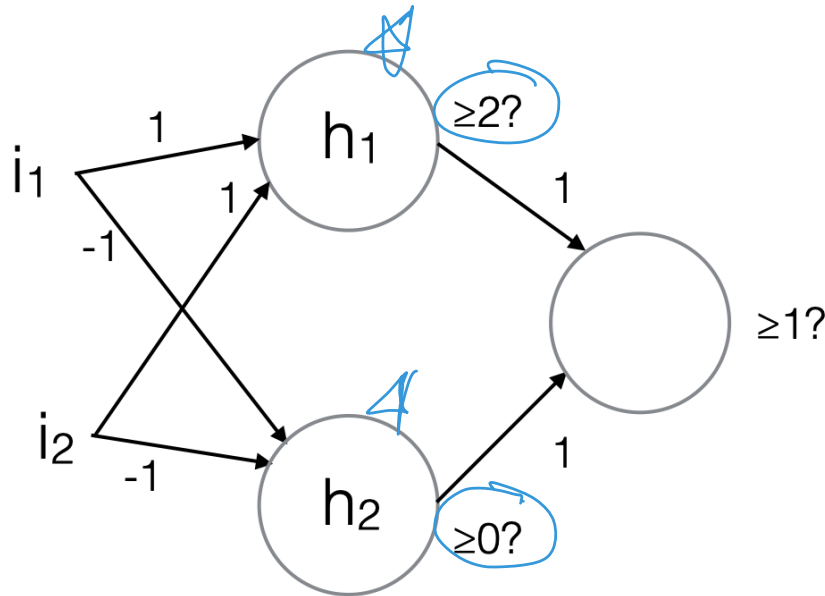


			Hidden layer input		Hidden layer output		
	$i_1$	$i_2$	$h_1$	$h_2$	$h_1$	$h_2$	$o$
$x_1$	0	0	0	0	0	1	1
$o_1$	0	1	1	-1	0	0	0
$o_2$	1	0	1	-1	0	0	0
$x_2$	1	1	2	-2	1	0	1

(for  $x_1$  and  $x_2$  the correct output is 1;  
for  $o_1$  and  $o_2$  the correct output is 0)

# Multilayer perceptron

- Recode the input: the hidden layer representations are now linearly separable

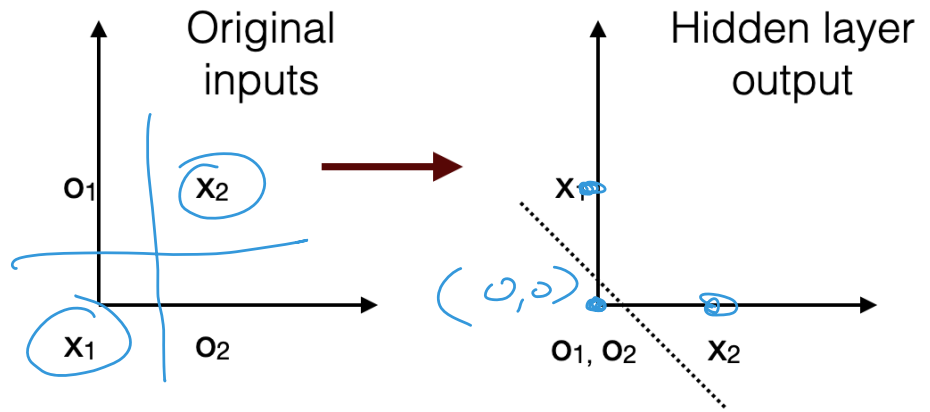


Not linearly separable


Linearly separable

	Hidden layer input		Hidden layer output		
	$i_1$	$i_2$	$h_1$	$h_2$	$o$
$x_1$	0	0	0	0	1
$o_1$	0	1	1	-1	0
$o_2$	1	0	1	-1	0
$x_2$	1	1	2	-2	1

# Decomposing the problem into predefined subproblems

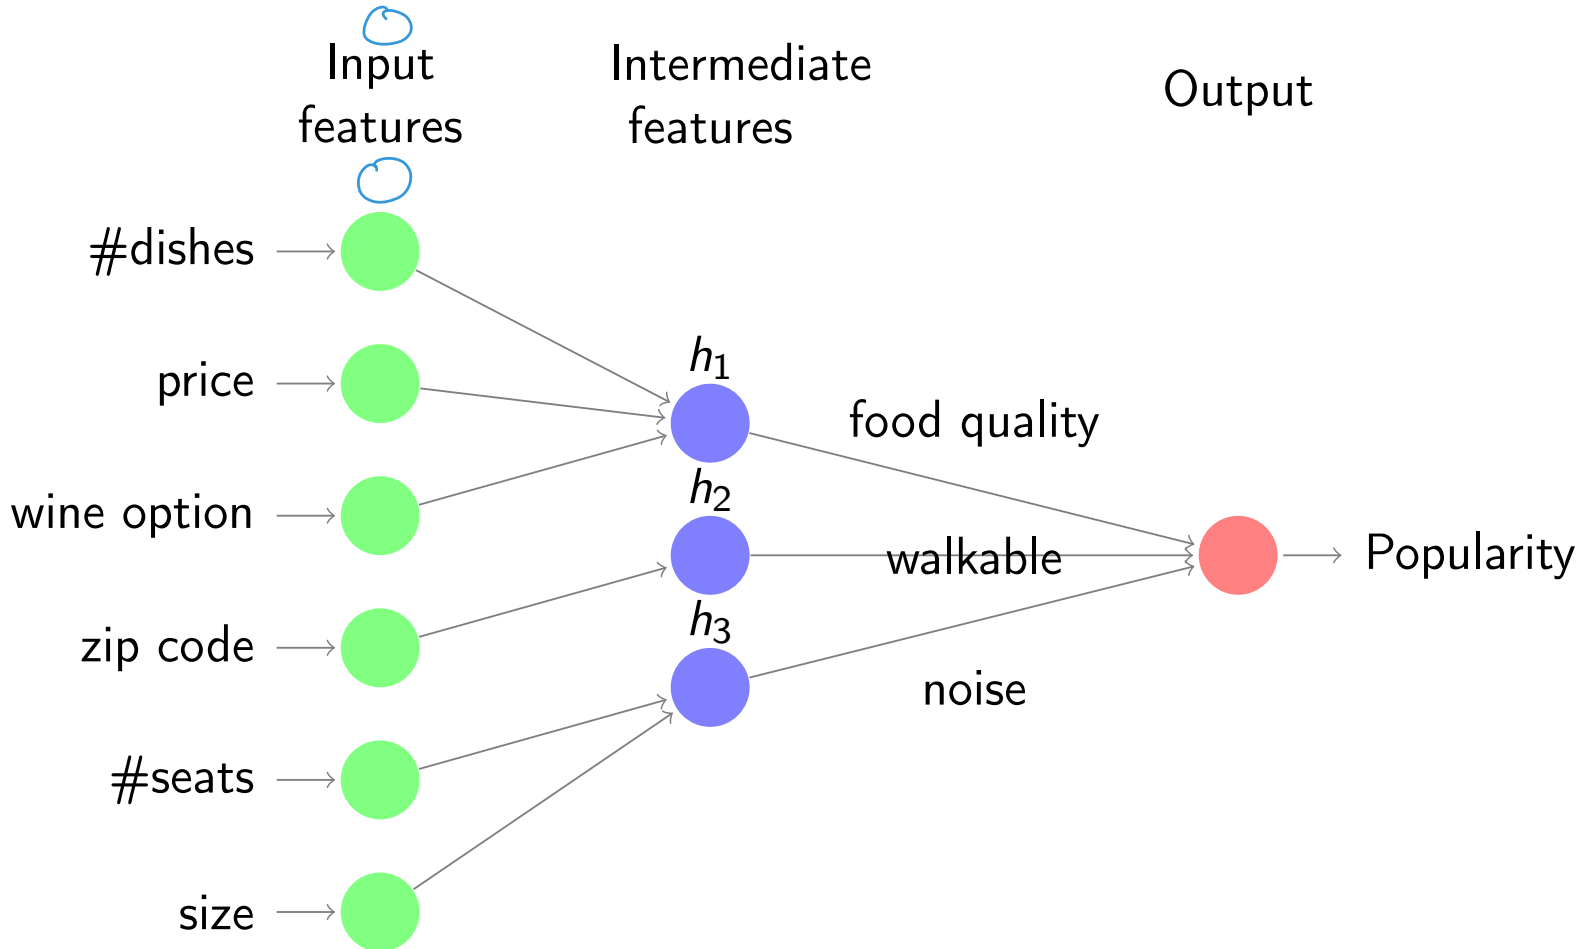

# Learned intermediate features

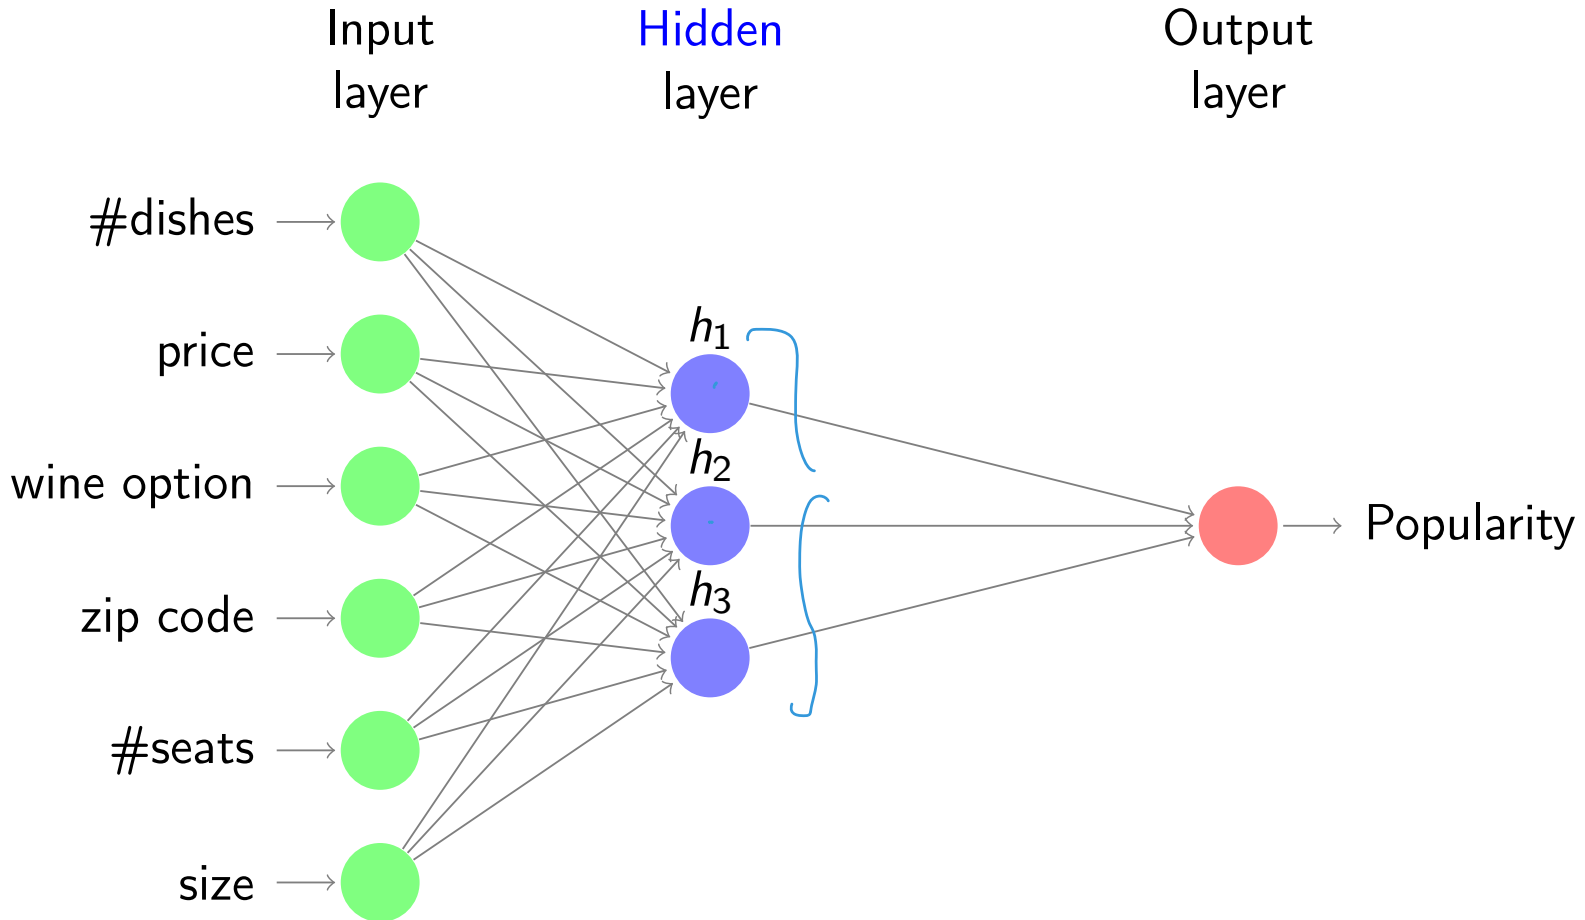





# Neural networks

**Key idea:** learn the intermediate features.

**Feature engineering** Manually specify  $\phi(x)$  based on domain knowledge and learn the weights:

$$f(x) = w^T \phi(x). \quad (2)$$


**Feature learning** Learn both the features ( $K$  hidden units) and the weights:

$$h(x) = [\underline{h_1}(x), \dots, \underline{h_K}(x)], \quad \phi(x) \quad (3)$$

$$f(x) = \underline{w}^T h(x) \quad h(x) \quad (4)$$


# Feature learning example

- A filter convolves over the image and looks for the highest pattern match.

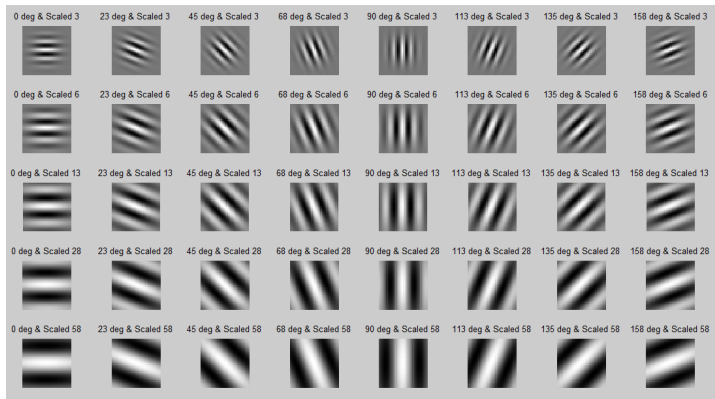


# Feature learning example

- A filter convolves over the image and looks for the highest pattern match.
- Traditionally, people use Gabor filters or other image feature extractors, e.g. SIFT, SURF, etc, and an SVM on top for image classification.

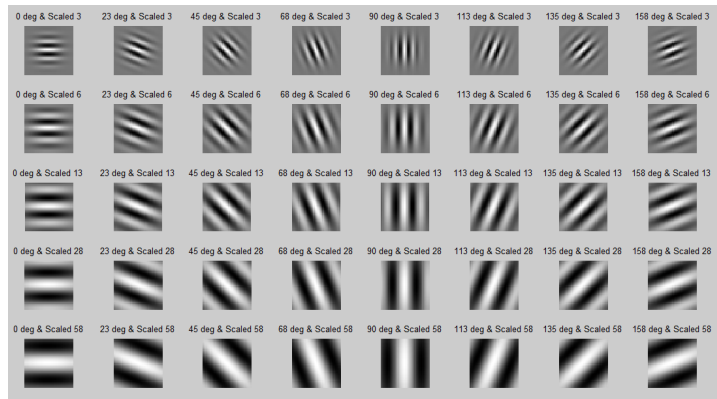

# Feature learning example

- A filter convolves over the image and looks for the highest pattern match.
- Traditionally, people use Gabor filters or other image feature extractors, e.g. SIFT, SURF, etc, and an SVM on top for image classification.
- Neural networks take in images and can learn the filters that are the most useful for solving the tasks. Likely more efficient than hand engineered features.

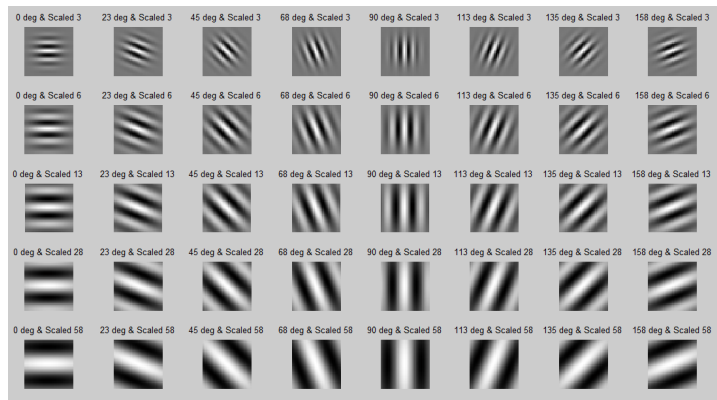

# Inspiration: The brain

- Our brain has about 100 billion ( $10^{11}$ ) neurons, each of which communicates (is connected) to  $\sim 10^4$  other neurons, with non-linear computations.


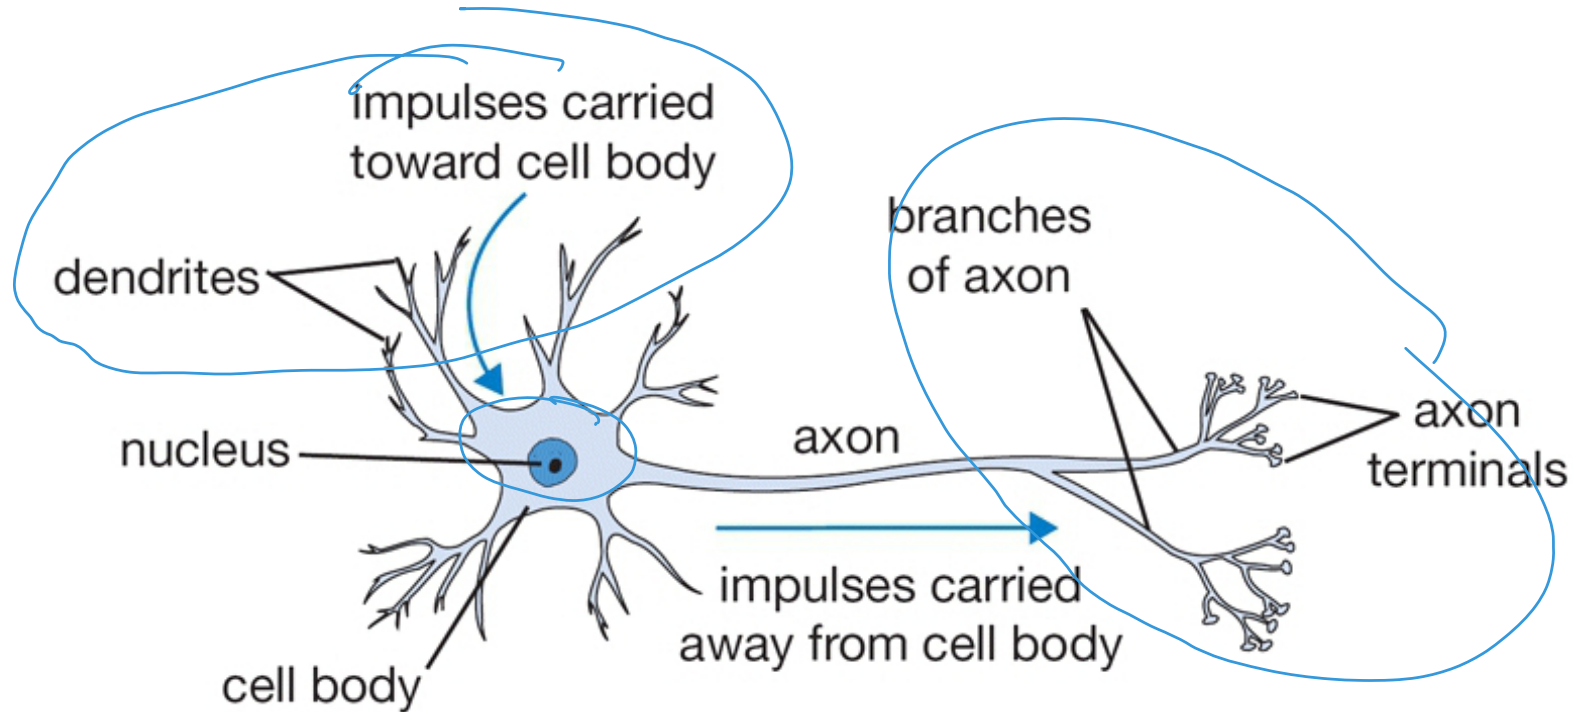


Figure: The basic computational unit of the brain: Neuron

# Inspiration: The brain

- Neurons receive input signals and accumulate voltage. After some threshold they will fire spiking responses.

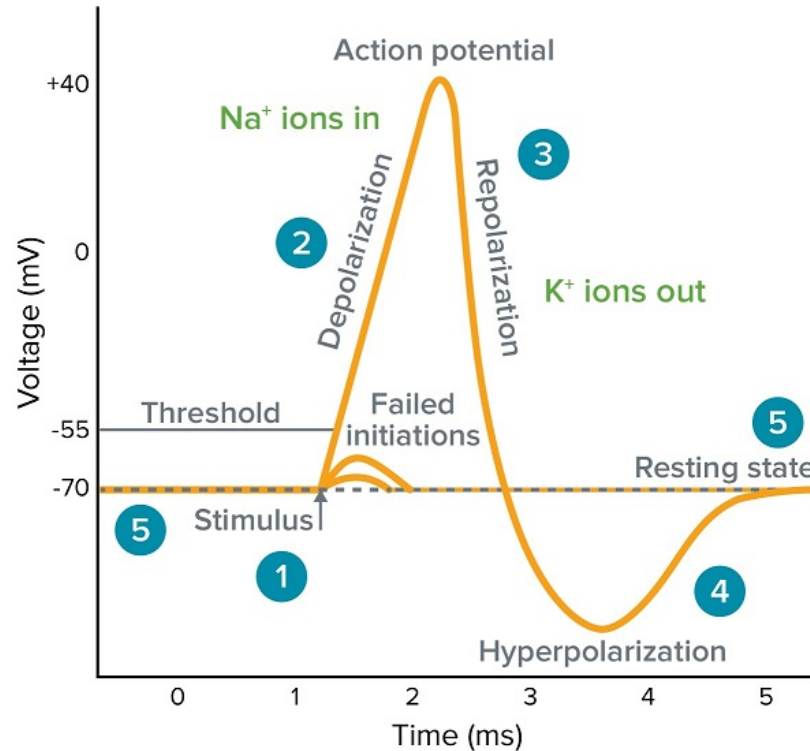

# Activation function

- We can model a simpler computation by using “activation function”.



# Activation function

- We can model a simpler computation by using “activation function”.
- It applies a non-linearity on the inputs and “fires” after some threshold.

# Activation function

- We can model a simpler computation by using “activation function”.
- It applies a non-linearity on the inputs and “fires” after some threshold.

$$h_i(x) = \sigma(v_i^T x).$$

activation weights input

(5)

# Activation function

- We can model a simpler computation by using “activation function”.
- It applies a non-linearity on the inputs and “fires” after some threshold.

$$h_i(x) = \sigma(v_i^T x). \quad (5)$$

- Some possible activation functions:

# Activation function

- We can model a simpler computation by using “activation function”.
- It applies a non-linearity on the inputs and “fires” after some threshold.

$$h_i(x) = \sigma(v_i^T x). \quad (5)$$

- Some possible activation functions:
  - sign function (as in classic perceptron)? **Non-differentiable.**

# Activation function

- We can model a simpler computation by using “activation function”.
- It applies a non-linearity on the inputs and “fires” after some threshold.


$$h_i(x) = \sigma(v_i^T x). \quad (5)$$

- Some possible activation functions:
  - sign function (as in classic perceptron)? **Non-differentiable.**
  - *Differentiable* approximations: sigmoid functions.
    - E.g., logistic function, hyperbolic tangent function.

# Activation function

- We can model a simpler computation by using “activation function”.
- It applies a non-linearity on the inputs and “fires” after some threshold.

$$h_i(x) = \sigma(v_i^T x). \quad (5)$$

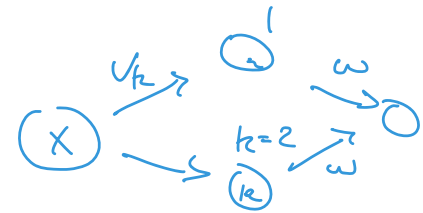


- Some possible activation functions:
  - sign function (as in classic perceptron)? **Non-differentiable.**
  - *Differentiable* approximations: sigmoid functions.
    - E.g., logistic function, hyperbolic tangent function.
- Two-layer neural network (one **hidden layer** and one **output layer**) with  $K$  hidden units:

$$f(x) = \sum_{k=1}^K w_k h_k(x) = \sum_{k=1}^K w_k \sigma(\underline{v}_k^T \underline{x}) \quad (6)$$

# Activation Functions

- The **hyperbolic tangent** is a common activation function:

$$\sigma(x) = \tanh(x).$$

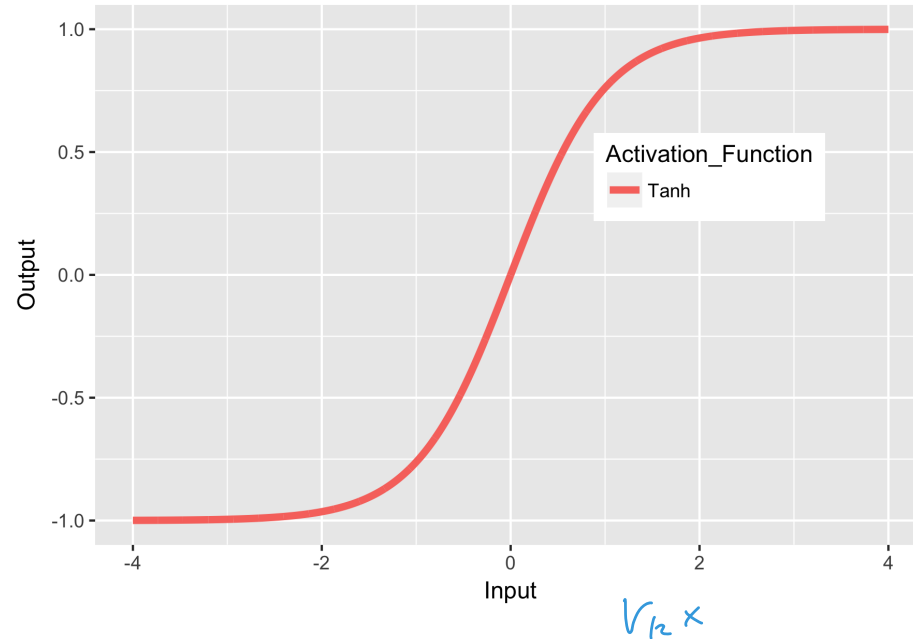


# Activation Functions

- More recently, the **rectified linear (ReLU)** function has been very popular:

$$\sigma(x) = \max(0, x).$$


- Faster to calculate this function and its derivatives
- Often more effective in practice

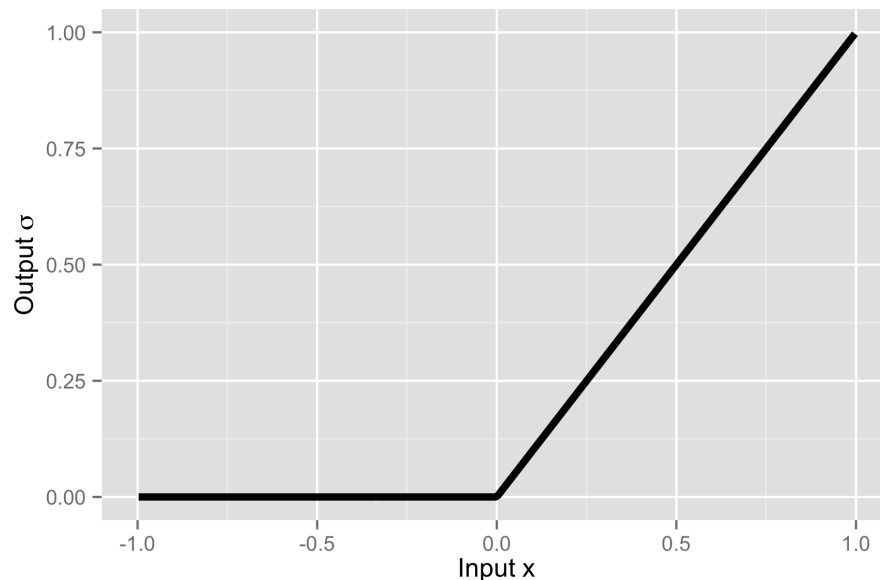



# Approximation Ability: $f(x) = x^2$


- 3 hidden units; tanh activation functions
- Blue dots are training points; dashed lines are hidden unit outputs; final output in red.

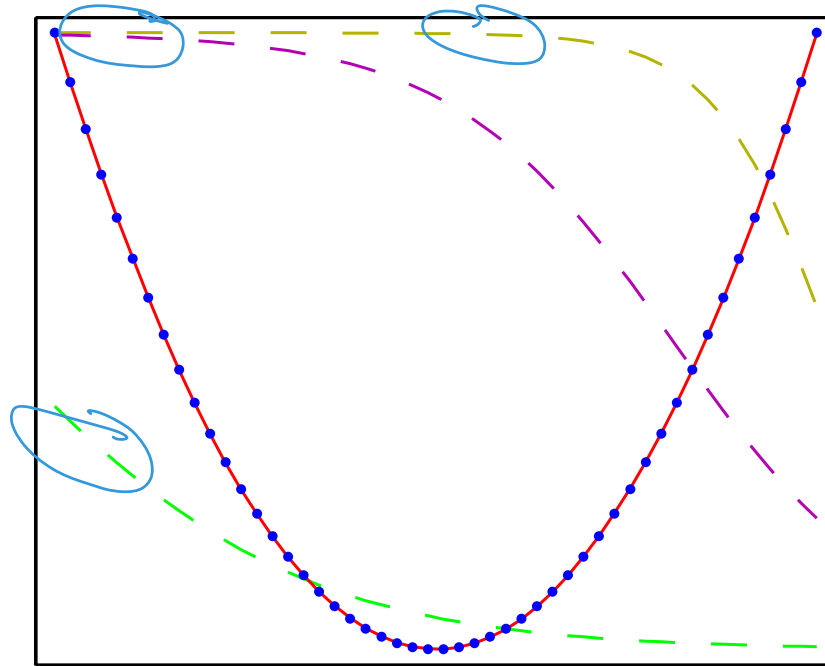

From Bishop's *Pattern Recognition and Machine Learning*, Fig 5.3

# Approximation Ability: $f(x) = \sin(x)$


- 3 hidden units; logistic activation function
- Blue dots are training points; dashed lines are hidden unit outputs; final output in red.

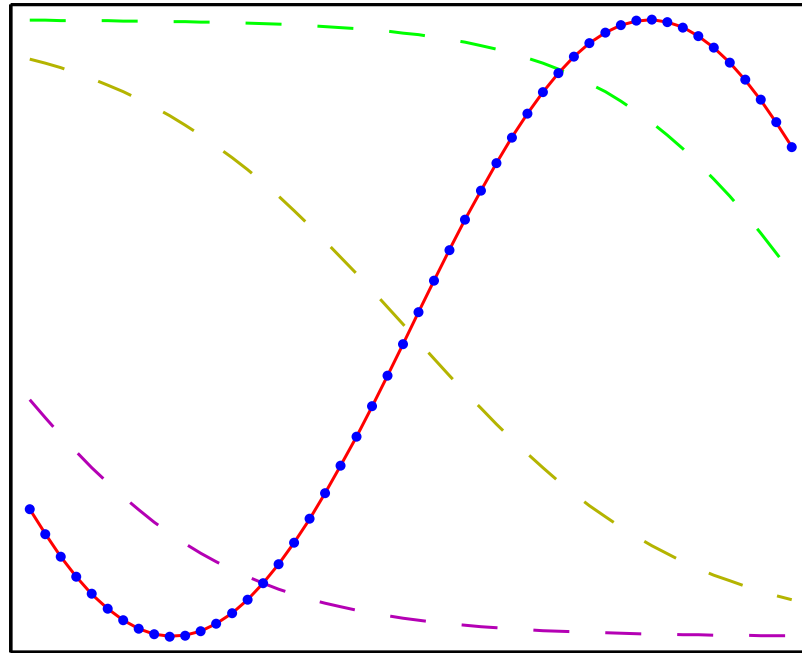

From Bishop's *Pattern Recognition and Machine Learning*, Fig 5.3

# Approximation Ability: $f(x) = |x|$

- 3 hidden units; logistic activation functions
- Blue dots are training points; dashed lines are hidden unit outputs; final output in red.

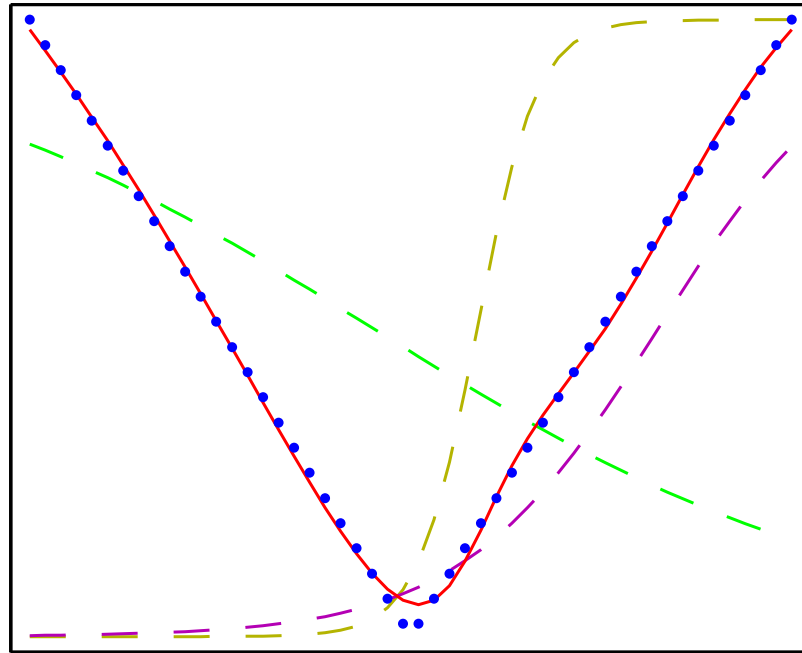

From Bishop's *Pattern Recognition and Machine Learning*, Fig 5.3

# Universal approximation theorem

## Theorem (Universal approximation theorem)

A neural network with one *possibly huge hidden layer*  $\hat{F}(x)$  can approximate any continuous function  $F(x)$  on a closed and bounded subset of  $\mathbb{R}^d$  under mild assumptions on the activation function, i.e.  $\forall \epsilon > 0$ , there exists an integer  $N$  s.t.

$$\hat{F}(x) = \sum_{i=1}^N w_i \sigma(v_i^T x + b_i) \quad (7)$$

satisfies  $|\hat{F}(x) - F(x)| < \epsilon$ .

# Universal approximation theorem

- For the theorem to work, the number of hidden units needs to be exponential in  $d$

# Universal approximation theorem


- For the theorem to work, the number of hidden units needs to be exponential in  $d$
- The theorem doesn't tell us how to find the parameters of this network

# Universal approximation theorem

- For the theorem to work, the number of hidden units needs to be exponential in  $d$
- The theorem doesn't tell us how to find the parameters of this network
- It doesn't explain why practical neural networks work, or tell us how to build them

# Deep neural networks

- Wider: more hidden units (as in the approximation theorem).
- Deeper: more hidden layers.

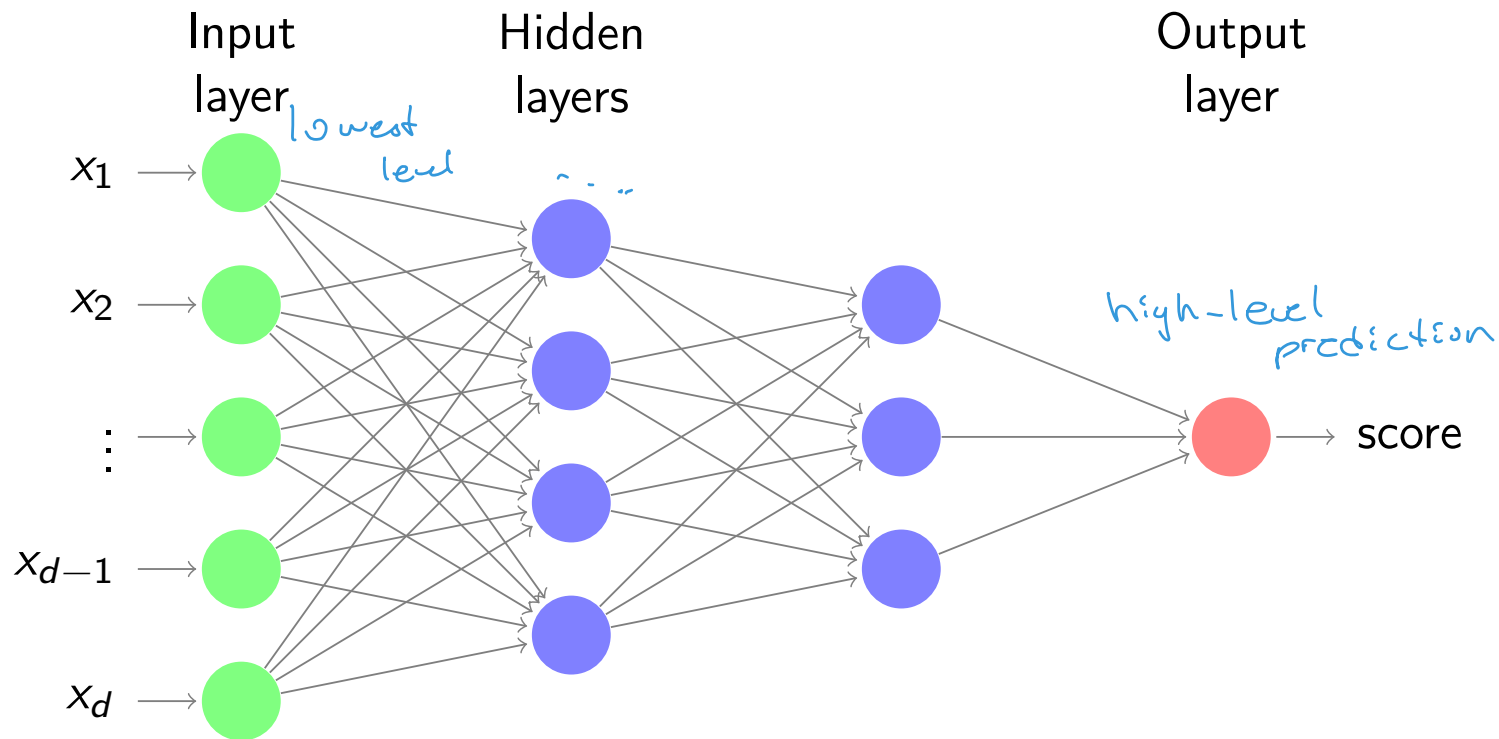



# Multilayer Perceptron (MLP): formal definition

- **Input space:**  $\mathcal{X} = \mathbb{R}^d$       **Output space**  $\mathcal{Y} = \mathbb{R}^k$  (for  $k$ -class classification).
- Let  $\sigma: \mathbb{R} \rightarrow \mathbb{R}$  be an activation function (e.g. tanh or ReLU).
- Let's consider an MLP of  $L$  hidden layers, each having  $m$  hidden units.

# Multilayer Perceptron (MLP): formal definition

- **Input space:**  $\mathcal{X} = \mathbb{R}^d$       **Output space**  $\mathcal{Y} = \mathbb{R}^k$  (for  $k$ -class classification).
- Let  $\sigma: \mathbb{R} \rightarrow \mathbb{R}$  be an activation function (e.g. tanh or ReLU).
- Let's consider an MLP of  $L$  hidden layers, each having  $m$  hidden units.
- First hidden layer is given by

$$h^{(1)}(x) = \sigma \left( \underline{W}^{(1)} x + b^{(1)} \right),$$

for parameters  $W^{(1)} \in \mathbb{R}^{m \times d}$  and  $b \in \mathbb{R}^m$ , and where  $\sigma(\cdot)$  is applied to each entry of its argument.

# Multilayer Perceptron (MLP): formal definition

- Each subsequent hidden layer takes the *output*  $o \in \mathbb{R}^m$  of previous layer and produces

$$h^{(j)}(o^{(j-1)}) = \sigma \left( W^{(j)} o^{(j-1)} + b^{(j)} \right), \text{ for } j = 2, \dots, L$$

where  $W^{(j)} \in \mathbb{R}^{m \times m}$ ,  $b^{(j)} \in \mathbb{R}^m$ .

# Multilayer Perceptron (MLP): formal definition

- Each subsequent hidden layer takes the *output*  $o \in \mathbb{R}^m$  of previous layer and produces

$$h^{(j)}(o^{(j-1)}) = \sigma \left( W^{(j)} o^{(j-1)} + b^{(j)} \right), \text{ for } j = 2, \dots, L$$

where  $W^{(j)} \in \mathbb{R}^{m \times m}$ ,  $b^{(j)} \in \mathbb{R}^m$ .

- Last layer is an affine mapping (no activation function):

$$a(o^{(L)}) = W^{(L+1)} o^{(L)} + b^{(L+1)},$$

where  $W^{(L+1)} \in \mathbb{R}^{k \times m}$  and  $b^{(L+1)} \in \mathbb{R}^k$ .

# Multilayer Perceptron (MLP): formal definition

- Each subsequent hidden layer takes the *output*  $o \in \mathbb{R}^m$  of previous layer and produces

$$h^{(j)}(o^{(j-1)}) = \sigma \left( W^{(j)} o^{(j-1)} + b^{(j)} \right), \text{ for } j = 2, \dots, L$$

where  $W^{(j)} \in \mathbb{R}^{m \times m}$ ,  $b^{(j)} \in \mathbb{R}^m$ .

- Last layer is an *affine* mapping (no activation function):

$$a(o^{(L)}) = W^{(L+1)} o^{(L)} + b^{(L+1)},$$

where  $W^{(L+1)} \in \mathbb{R}^{k \times m}$  and  $b^{(L+1)} \in \mathbb{R}^k$ .

- The full neural network function is given by the *composition* of layers:


$$f(x) = \left( a \circ h^{(L)} \circ \dots \circ h^{(1)} \right) (x) \tag{8}$$

# Multilayer Perceptron (MLP): formal definition

- Each subsequent hidden layer takes the *output*  $o \in \mathbb{R}^m$  of previous layer and produces

$$h^{(j)}(o^{(j-1)}) = \sigma \left( W^{(j)} o^{(j-1)} + b^{(j)} \right), \text{ for } j = 2, \dots, L$$

where  $W^{(j)} \in \mathbb{R}^{m \times m}$ ,  $b^{(j)} \in \mathbb{R}^m$ .



A handwritten blue vector notation  $\begin{bmatrix} 2 \\ 0 \\ 1 \end{bmatrix}$ .

- Last layer is an *affine* mapping (no activation function):

$$a(o^{(L)}) = W^{(L+1)} o^{(L)} + b^{(L+1)},$$



A handwritten blue vector notation  $\begin{bmatrix} 0.6 \end{bmatrix}$ .

where  $W^{(L+1)} \in \mathbb{R}^{k \times m}$  and  $b^{(L+1)} \in \mathbb{R}^k$ .

- The full neural network function is given by the *composition* of layers:

$$f(x) = \left( a \circ h^{(L)} \circ \dots \circ h^{(1)} \right) (x) \tag{8}$$

- Typically, the last layer gives us a score. How do we perform classification?

# What did we do in multinomial logistic regression?

- From each  $x$ , we compute a linear score function for each class:

$$x \mapsto (\langle w_1, x \rangle, \dots, \langle w_k, x \rangle) \in \mathbb{R}^k$$

- We need to map this  $\mathbb{R}^k$  vector into a probability vector  $\theta$ .

# What did we do in multinomial logistic regression?

- From each  $x$ , we compute a linear score function for each class:

$$x \mapsto (\langle w_1, x \rangle, \dots, \langle w_k, x \rangle) \in \mathbb{R}^k$$

$$\begin{bmatrix} 0.67 \\ 0 \\ 0.33 \end{bmatrix}$$

- We need to map this  $\mathbb{R}^k$  vector into a probability vector  $\theta$ .
- The **softmax function** maps scores  $s = (s_1, \dots, s_k) \in \mathbb{R}^k$  to a categorical distribution:

$$(s_1, \dots, s_k) \mapsto \theta = \mathbf{Softmax}(s_1, \dots, s_k) = \left( \frac{\exp(s_1)}{\sum_{i=1}^k \exp(s_i)}, \dots, \frac{\exp(s_k)}{\sum_{i=1}^k \exp(s_i)} \right)$$



# Nonlinear Generalization of Multinomial Logistic Regression

- From each  $x$ , we compute a non-linear score function for each class:

$$x \mapsto (f_1(x), \dots, f_k(x)) \in \mathbb{R}^k$$

where  $f_i$ 's are the outputs of the last hidden layer of a neural network.

- Learning: Maximize the log-likelihood of training data

$k = 3$   
 $y = 1$   
 $\left[ \downarrow \uparrow \downarrow \right]$   
 $0, 1, 2$

$$\arg \max_{f_1, \dots, f_k} \sum_{i=1}^n \log \left[ \text{Softmax}(f_1(x), \dots, f_k(x))_{y_i} \right].$$

$(x, y)$        $f(x) = \text{higher scores for the true } y$

# Interim discussion

$$\phi(x)$$

- With the right representations, we can turn nonlinear problems into linear ones
- The goal of representation learning is to automatically discover useful features from raw data

# Interim discussion

- With the right representations, we can turn nonlinear problems into linear ones
- The goal of representation learning is to automatically discover useful features from raw data
- Building blocks:

Input layer no learnable parameters  $x$

Hidden layer(s) affine + *nonlinear* activation function  $h = \sigma(wx + b)$

Output layer affine (+ softmax)  $f(o^{L-1}) = w o^{L-1} + b$

# Interim discussion

- With the right representations, we can turn nonlinear problems into linear ones
- The goal of representation learning is to automatically discover useful features from raw data
- Building blocks:
  - Input layer no learnable parameters
  - Hidden layer(s) affine + *nonlinear* activation function
  - Output layer affine (+ softmax)
- A single, potentially huge hidden layer is sufficient to approximate any function
- In practice, it is often helpful to have multiple hidden layers

# Fitting the parameters of an MLP

- **Input space:**  $\mathcal{X} = \mathbb{R}$
- **Output space:**  $\mathcal{Y} = \mathbb{R}$
- **Hypothesis space:** MLPs with a single 3-node hidden layer:

$$\underline{f}(x) = \underline{w}_0 + \underline{w}_1 h_1(x) + \underline{w}_2 h_2(x) + \underline{w}_3 h_3(x),$$

where

$$\underline{h}_i(x) = \sigma(v_i x + b_i) \text{ for } i = 1, 2, 3,$$

for some fixed activation function  $\sigma: \mathbb{R} \rightarrow \mathbb{R}$ .

- What are the parameters we need to fit?

$$w_0 \dots w_3, v_1 \dots v_3, b_1 \dots b_3$$

# Fitting the parameters of an MLP

- **Input space:**  $\mathcal{X} = \mathbb{R}$
- **Output space:**  $\mathcal{Y} = \mathbb{R}$
- **Hypothesis space:** MLPs with a single 3-node hidden layer:

$$f(x) = w_0 + w_1 h_1(x) + w_2 h_2(x) + w_3 h_3(x),$$

where

$$h_i(x) = \sigma(v_i x + b_i) \text{ for } i = 1, 2, 3,$$

for some fixed activation function  $\sigma: \mathbb{R} \rightarrow \mathbb{R}$ .

- What are the parameters we need to fit?

$$b_1, b_2, b_3, v_1, v_2, v_3, w_0, w_1, w_2, w_3 \in \mathbb{R}$$

# Finding the best hypothesis

- As usual, we choose our prediction function using empirical risk minimization.

# Finding the best hypothesis

- As usual, we choose our prediction function using empirical risk minimization.
- Our hypothesis space is parameterized by

$$\theta = (\underbrace{b_1, b_2, b_3, v_1, v_2, v_3, w_0, w_1, w_2, w_3}) \in \Theta = \mathbb{R}^{10}$$



# Finding the best hypothesis

- As usual, we choose our prediction function using empirical risk minimization.
- Our hypothesis space is parameterized by

$$\theta = (b_1, b_2, b_3, v_1, v_2, v_3, w_0, w_1, w_2, w_3) \in \Theta = \mathbb{R}^{10}$$

- For a training set  $(x_1, y_1), \dots, (x_n, y_n)$ , our goal is to find

$$\hat{\theta} = \arg \min_{\theta \in \mathbb{R}^{10}} \frac{1}{n} \sum_{i=1}^n (f(x_i; \theta) - y_i)^2.$$

*neural networks*

## How do we learn these parameters?

- For a training set  $(x_1, y_1), \dots, (x_n, y_n)$ , our goal is to find

$$\hat{\theta} = \arg \min_{\theta \in \mathbb{R}^{10}} \frac{1}{n} \sum_{i=1}^n (f(x_i; \theta) - y_i)^2.$$

- We can use gradient descent
- Is  $f$  differentiable w.r.t.  $\theta$ ?  $f(x) = w_0 + \sum_{i=1}^3 w_i \tanh(v_i x + b_i)$ .

## How do we learn these parameters?

- For a training set  $(x_1, y_1), \dots, (x_n, y_n)$ , our goal is to find


$$\hat{\theta} = \arg \min_{\theta \in \mathbb{R}^{10}} \frac{1}{n} \sum_{i=1}^n (f(x_i; \theta) - y_i)^2.$$

- We can use gradient descent
- Is  $f$  differentiable w.r.t.  $\theta$ ?  $f(x) = w_0 + \sum_{i=1}^3 w_i \tanh(v_i x + b_i)$ .
- Is the loss convex in  $\theta$ ?

# How do we learn these parameters?

- For a training set  $(x_1, y_1), \dots, (x_n, y_n)$ , our goal is to find

$$\hat{\theta} = \arg \min_{\theta \in \mathbb{R}^{10}} \frac{1}{n} \sum_{i=1}^n (f(x_i; \theta) - y_i)^2.$$

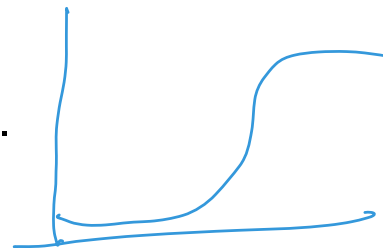

- We can use gradient descent
- Is  $f$  differentiable w.r.t.  $\theta$ ?  $f(x) = w_0 + \sum_{i=1}^3 w_i \tanh(v_i x + b_i)$ .
- Is the loss convex in  $\theta$ ?
  - $\tanh$  is not convex
  - Regardless of nonlinearity, the composition of convex functions is not necessarily convex
- We might converge to a local minimum.

# Gradient descent for (large) neural networks

- Mathematically, it's just *partial derivatives*, which you can compute by hand using the *chain rule*
  - In practice, this could be **time-consuming** and **error-prone**

# Gradient descent for (large) neural networks


- Mathematically, it's just *partial derivatives*, which you can compute by hand using the *chain rule*
  - In practice, this could be **time-consuming** and **error-prone**
- Back-propagation computes gradients for neural networks (and other models) in a systematic and efficient way

# Gradient descent for (large) neural networks

- Mathematically, it's just *partial derivatives*, which you can compute by hand using the *chain rule*
  - In practice, this could be **time-consuming** and **error-prone**
- Back-propagation computes gradients for neural networks (and other models) in a systematic and efficient way
- We can visualize the process using *computation graphs*, which expose the structure of the computation (**modularity** and **dependency**)

# Functions as nodes in a graph

- We represent each component of the network as a *node* that takes in a set of *inputs* and produces a set of *outputs*.
- Example:  $g : \mathbb{R}^p \rightarrow \mathbb{R}^n$ .
  - Typical computation graph:

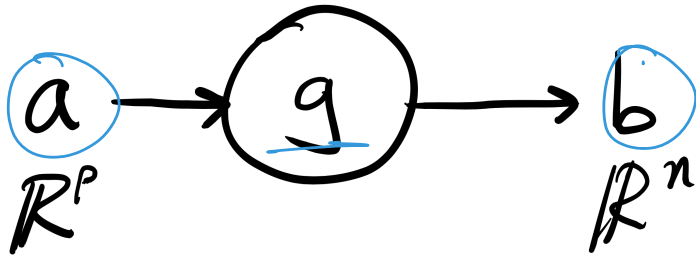





# Functions as nodes in a graph

- We represent each component of the network as a *node* that takes in a set of *inputs* and produces a set of *outputs*.
- Example:  $g : \mathbb{R}^p \rightarrow \mathbb{R}^n$ .

- Typical computation graph:

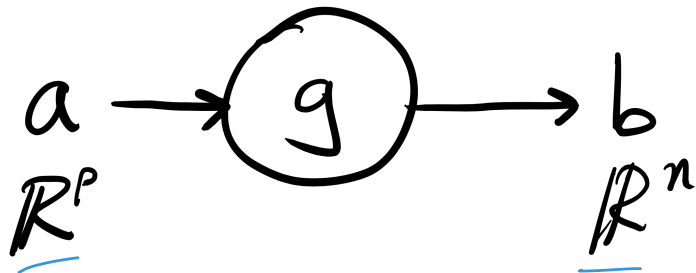


- Broken down by component:

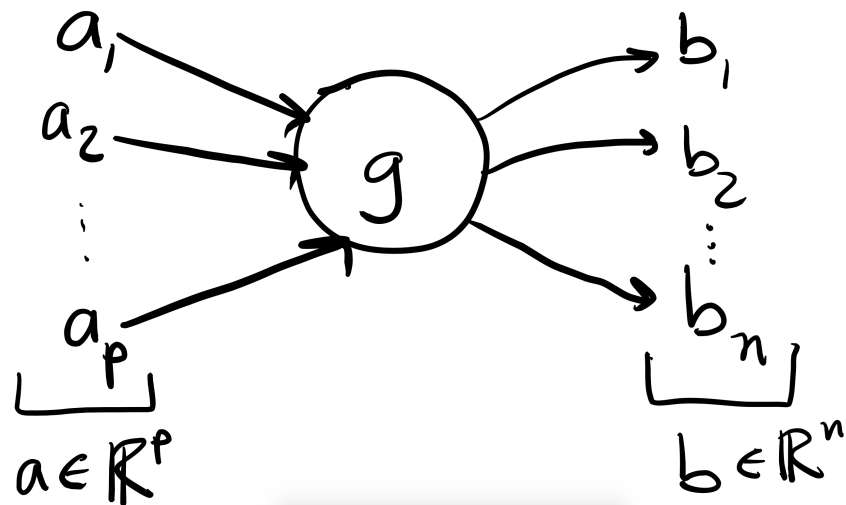

# Partial derivatives of an affine function


- Define the affine function  $g(x) = Mx + c$ , for  $M \in \mathbb{R}^{n \times p}$  and  $c \in \mathbb{R}^n$ .

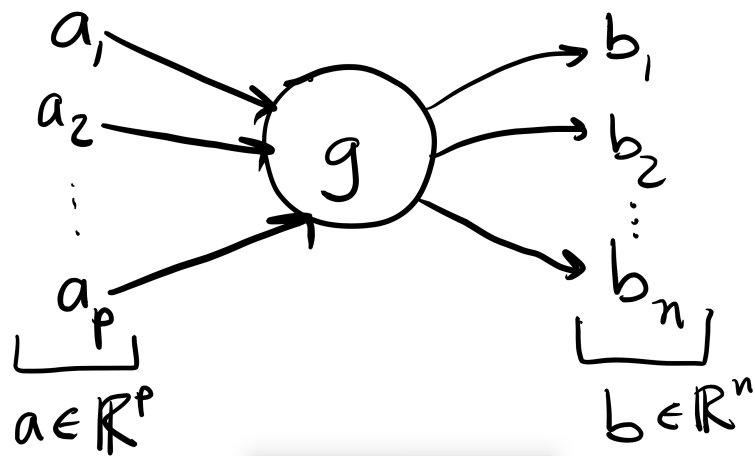

# Partial derivatives of an affine function


- Define the affine function  $g(x) = Mx + c$ , for  $M \in \mathbb{R}^{n \times p}$  and  $c \in \mathbb{R}^n$ .

- Let  $b = g(a) = Ma + c$ . What is  $b_i$ ?

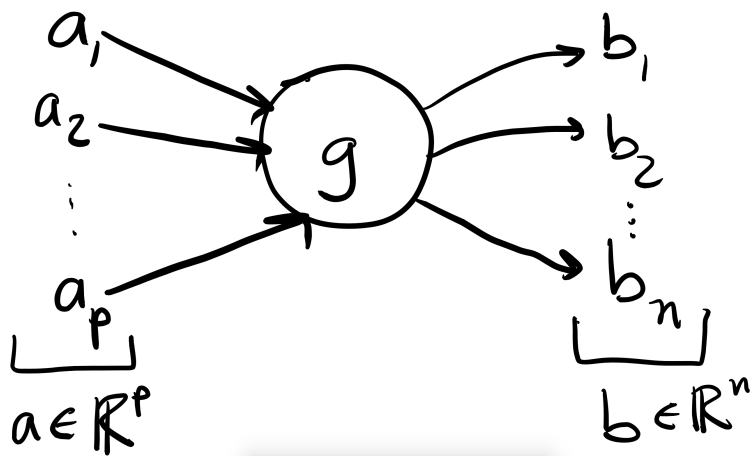

# Partial derivatives of an affine function

- Define the affine function  $g(x) = Mx + c$ , for  $M \in \mathbb{R}^{n \times p}$  and  $c \in \mathbb{R}$ .

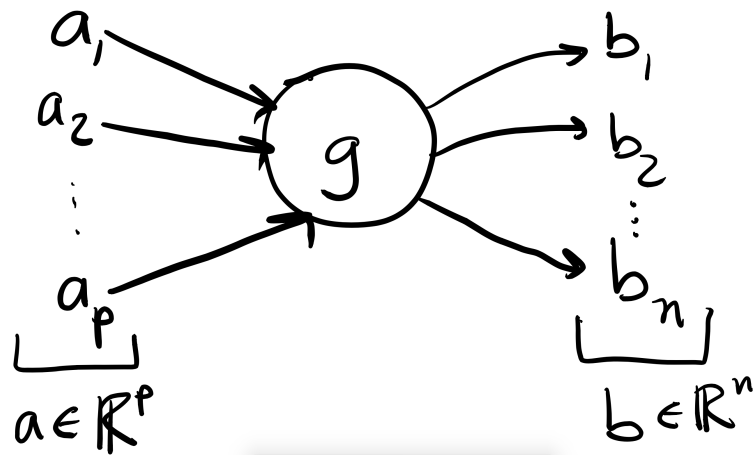


- Let  $b = g(a) = Ma + c$ . What is  $b_i$ ?
- $b_i$  depends on the  $i$ th row of  $M$ :

$$b_i = \sum_{k=1}^p M_{ik} a_k + c_i.$$

# Partial derivatives of an affine function

- Define the affine function  $g(x) = Mx + c$ , for  $M \in \mathbb{R}^{n \times p}$  and  $c \in \mathbb{R}$ .

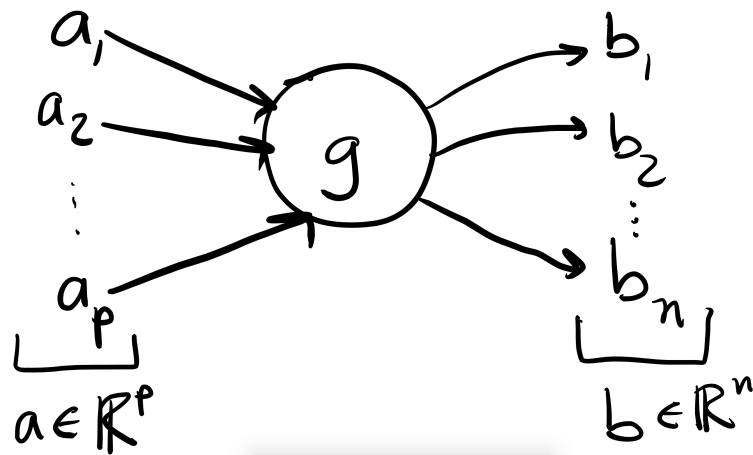

- Let  $b = g(a) = Ma + c$ . What is  $b_i$ ?
- $b_i$  depends on the  $i$ th row of  $M$ :


$$b_i = \sum_{k=1}^p M_{ik} a_k + c_i.$$

- If  $a_j \leftarrow a_j + \delta$ , what is  $b_i$ ?

$$b_i \leftarrow b_i + \underline{M_{ij}} \delta.$$

# Partial derivatives of an affine function

- Define the affine function  $g(x) = Mx + c$ , for  $M \in \mathbb{R}^{n \times p}$  and  $c \in \mathbb{R}$ .

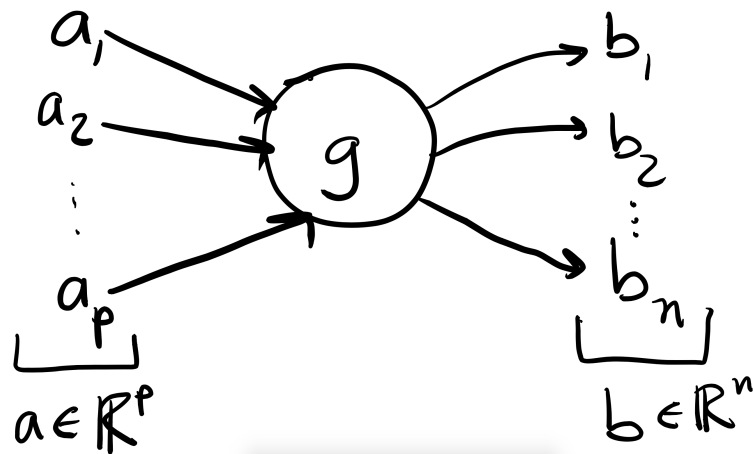

- Let  $b = g(a) = Ma + c$ . What is  $b_i$ ?
- $b_i$  depends on the  $i$ th row of  $M$ :

$$b_i = \sum_{k=1}^p M_{ik} a_k + c_i.$$


- If  $a_j \leftarrow a_j + \delta$ , what is  $b_i$ ?

$$b_i \leftarrow b_i + M_{ij} \delta.$$

The partial derivative/gradient measures *sensitivity*: If we perturb an input a little bit, how much does the output change?

# Partial derivatives in general

- Consider a function  $g: \mathbb{R}^p \rightarrow \mathbb{R}^n$ .

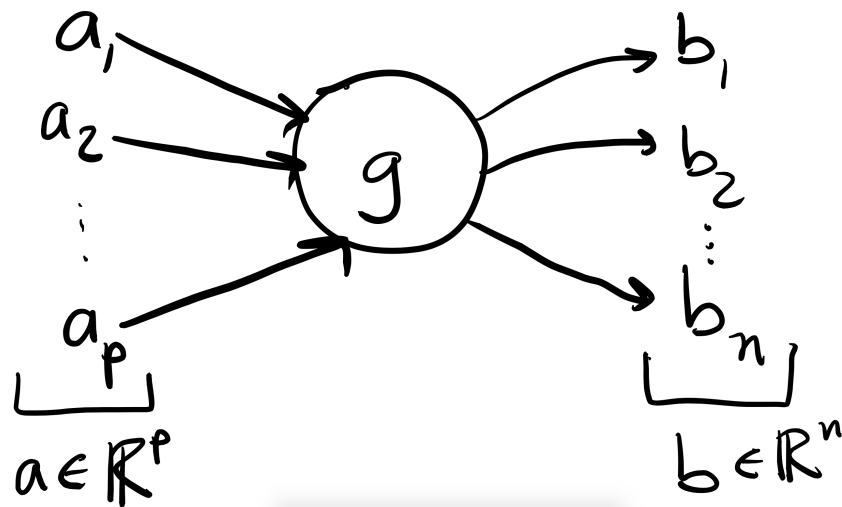

- Partial derivative  $\frac{\partial b_i}{\partial a_j}$  is the rate of change of  $b_i$  as we change  $a_j$
- If we change  $a_j$  slightly to  $a_j + \delta$ ,
- Then (for small  $\delta$ ),  $b_i$  changes to approximately


$$b_i + \frac{\partial b_i}{\partial a_j} \delta.$$

# Composing multiple functions

- We have  $g: \mathbb{R}^p \rightarrow \mathbb{R}^n$  and  $f: \mathbb{R}^n \rightarrow \mathbb{R}^m$
- $b = g(a)$ ,  $c = f(b)$ .

- How does a small change in  $a_j$  affect  $c_i$ ?


$$d_2 \leftarrow a_2 + \delta$$

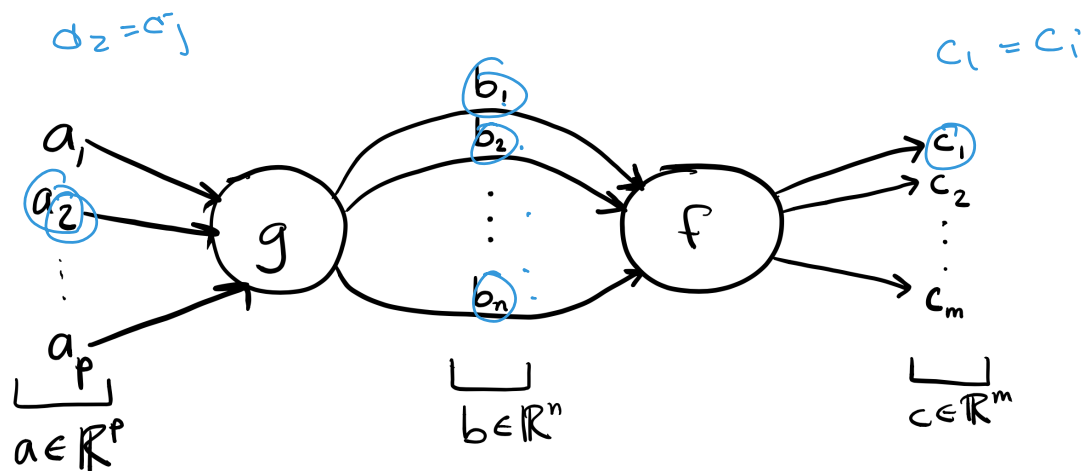



# Composing multiple functions

- We have  $g : \mathbb{R}^p \rightarrow \mathbb{R}^n$  and  $f : \mathbb{R}^n \rightarrow \mathbb{R}^m$
- $b = g(a)$ ,  $c = f(b)$ .

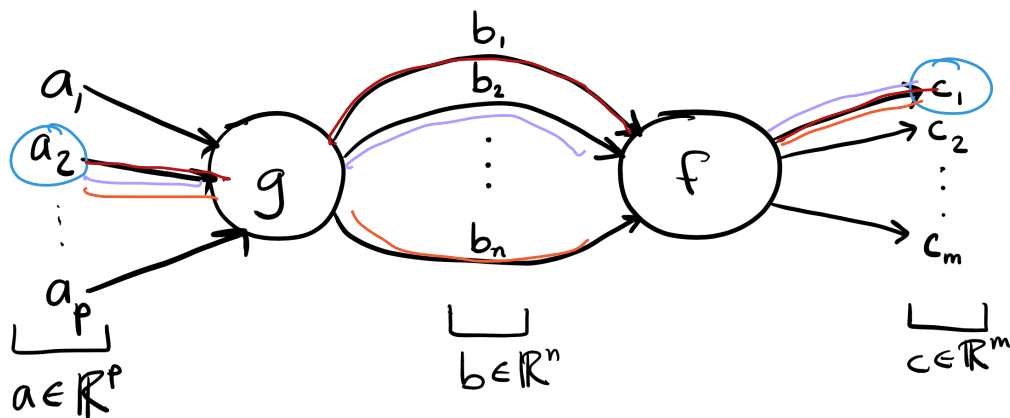


- How does a small change in  $a_j$  affect  $c_i$ ?
- Visualizing the **chain rule**:
  - We **sum** changes induced on all paths from  $a_j$  to  $c_i$ .
  - The change contributed by each path is the **product** of changes on each edge along the path.

$$\frac{\delta c_i}{\delta a_j} = \sum_{k=1}^n \frac{\delta c_i}{\delta b_k} \frac{\delta b_k}{\delta a_j}$$

# Composing multiple functions

- We have  $g : \mathbb{R}^p \rightarrow \mathbb{R}^n$  and  $f : \mathbb{R}^n \rightarrow \mathbb{R}^m$
- $b = g(a)$ ,  $c = f(b)$ .

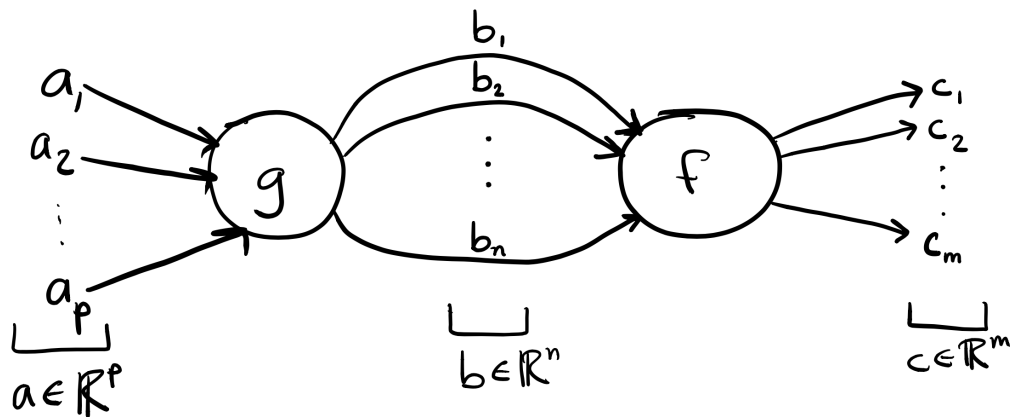

- How does a small change in  $a_j$  affect  $c_i$ ?
- Visualizing the **chain rule**:
  - We **sum** changes induced on all paths from  $a_j$  to  $c_i$ .
  - The change contributed by each path is the **product** of changes on each edge along the path.

$$\frac{\partial c_i}{\partial a_j} = \sum_{k=1}^n \frac{\partial c_i}{\partial b_k} \frac{\partial b_k}{\partial a_j}$$

## Example: Linear least squares

- Hypothesis space  $\{ \underline{f(x) = w^T x + b} \mid w \in \mathbb{R}^d, b \in \mathbb{R} \}$ .

- Data set  $\underline{(x_1, y_1), \dots, (x_n, y_n)} \in \mathbb{R}^d \times \mathbb{R}$ .

- Define

$$\ell_i(w, b) = [ \overset{\text{prediction}}{(w^T x_i + b)} - y_i ]^2.$$

## Example: Linear least squares

- Hypothesis space  $\{f(x) = w^T x + b \mid w \in \mathbb{R}^d, b \in \mathbb{R}\}$ .

- Data set  $(x_1, y_1), \dots, (x_n, y_n) \in \mathbb{R}^d \times \mathbb{R}$ .

- Define

$$\ell_i(w, b) = [(w^T x_i + b) - y_i]^2.$$

- In SGD, in each round we choose a random training instance  $i \in 1, \dots, n$  and take a gradient step

$$w_j \leftarrow w_j - \eta \frac{\partial \ell_i(w, b)}{\partial w_j}, \text{ for } j = 1, \dots, d$$
$$b \leftarrow b - \eta \frac{\partial \ell_i(w, b)}{\partial b},$$

for some step size  $\eta > 0$ .

- How do we calculate these partial derivatives on a computation graph?

# Computation graph and intermediate variables

- For a training point  $(x, y)$ , the loss is

$$\ell(w, b) = [(w^T x + b) - y]^2.$$

# Computation graph and intermediate variables

- For a training point  $(x, y)$ , the loss is

$$\ell(w, b) = [(w^T x + b) - y]^2.$$

- Let's break this down into intermediate computations:

$$\text{(prediction) } \hat{y} = \sum_{j=1}^d w_j x_j + b$$

# Computation graph and intermediate variables

- For a training point  $(x, y)$ , the loss is

$$\ell(w, b) = [(w^T x + b) - y]^2.$$

- Let's break this down into intermediate computations:

$$\text{(prediction) } \hat{y} = \sum_{j=1}^d w_j x_j + b$$

$$\text{(residual) } r = y - \hat{y}$$

# Computation graph and intermediate variables

- For a training point  $(x, y)$ , the loss is

$$\ell(w, b) = [(w^T x + b) - y]^2.$$

$\hat{y}$   
 $(\hat{y} - y) \Rightarrow (\hat{y} - y)^2$

- Let's break this down into intermediate computations:

$$\text{(prediction) } \hat{y} = \sum_{j=1}^d w_j x_j + b$$

$$\text{(residual) } r = y - \hat{y}$$

$$\text{(loss) } \ell = r^2$$



# Computation graph and intermediate variables

- For a training point  $(x, y)$ , the loss is


$$\ell(w, b) = [(w^T x + b) - y]^2.$$

- Let's break this down into intermediate computations:

$$\text{(prediction) } \hat{y} = \sum_{j=1}^d w_j x_j + b$$


$$\text{(residual) } r = y - \hat{y}$$

$$\text{(loss) } \ell = r^2$$

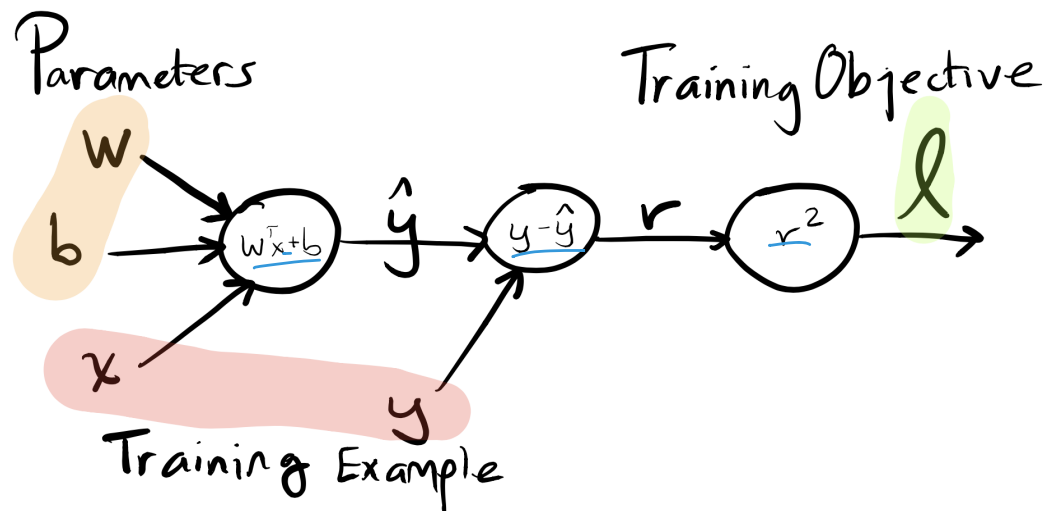


# Partial derivatives on computation graph

- We'll work our way from the output  $\ell$  back to the parameters  $w$  and  $b$ , reusing previous computations as much as possible:

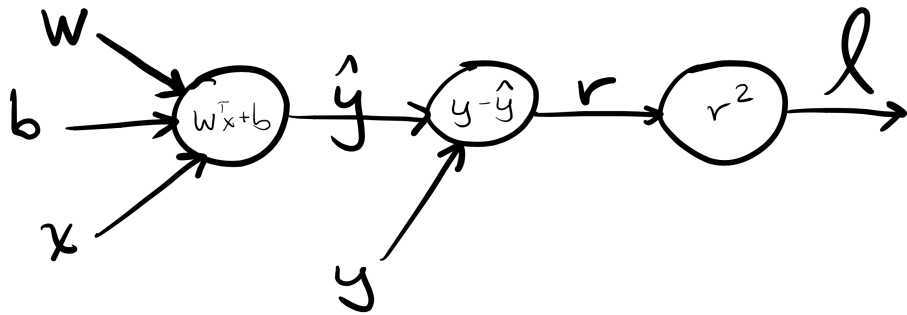

# Partial derivatives on computation graph


- We'll work our way from the output  $\ell$  back to the parameters  $w$  and  $b$ , reusing previous computations as much as possible:

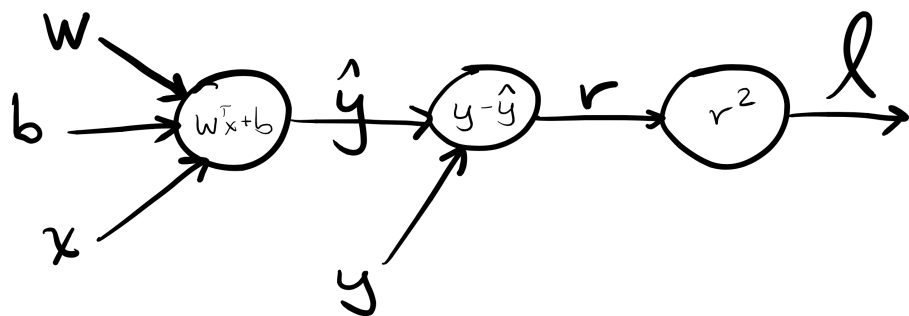

$$\frac{\partial \ell}{\partial r} = 2r$$

# Partial derivatives on computation graph


- We'll work our way from the output  $\ell$  back to the parameters  $w$  and  $b$ , reusing previous computations as much as possible:

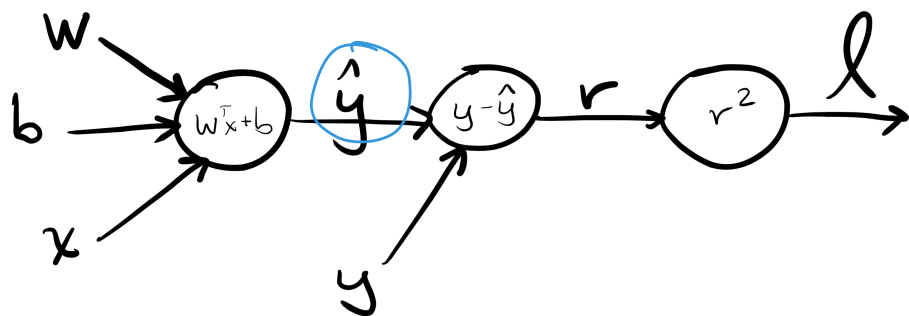

$$\begin{aligned}\frac{\partial \ell}{\partial r} &= 2r \\ \frac{\partial \ell}{\partial \hat{y}} &= \left( \frac{\partial \ell}{\partial r} \right) \frac{dr}{d\hat{y}} \\ &= (2r)(-1)\end{aligned}$$

# Partial derivatives on computation graph


- We'll work our way from the output  $\ell$  back to the parameters  $w$  and  $b$ , reusing previous computations as much as possible:

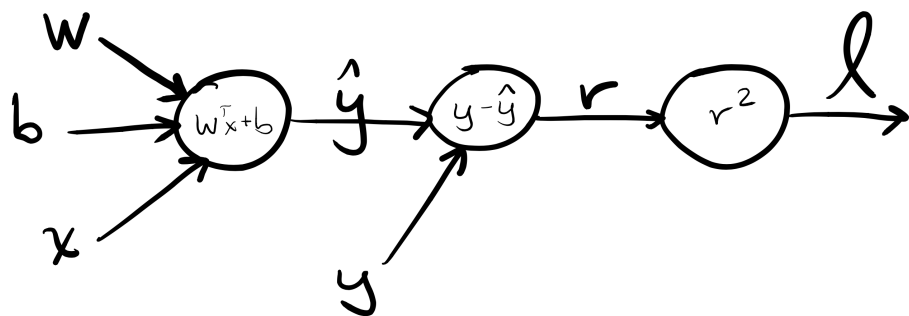

$$\begin{aligned}\frac{\partial \ell}{\partial r} &= 2r \\ \frac{\partial \ell}{\partial \hat{y}} &= \frac{\partial \ell}{\partial r} \frac{\partial r}{\partial \hat{y}} = (2r)(-1) = -2r \\ \frac{\partial \ell}{\partial b} &= \downarrow \frac{\partial \hat{y}}{\partial b}\end{aligned}$$

# Partial derivatives on computation graph


- We'll work our way from the output  $\ell$  back to the parameters  $w$  and  $b$ , reusing previous computations as much as possible:

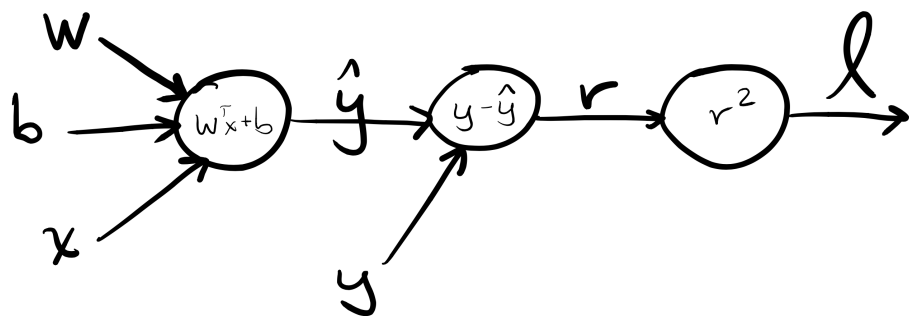

$$\begin{aligned}\frac{\partial \ell}{\partial r} &= 2r \\ \frac{\partial \ell}{\partial \hat{y}} &= \frac{\partial \ell}{\partial r} \frac{\partial r}{\partial \hat{y}} = (2r)(-1) = -2r \\ \frac{\partial \ell}{\partial b} &= \frac{\partial \ell}{\partial \hat{y}} \frac{\partial \hat{y}}{\partial b} = (-2r)(\underline{1}) = -2r \\ \frac{\partial \ell}{\partial w_j} &= \end{aligned}$$

# Partial derivatives on computation graph

- We'll work our way from the output  $\ell$  back to the parameters  $w$  and  $b$ , reusing previous computations as much as possible:

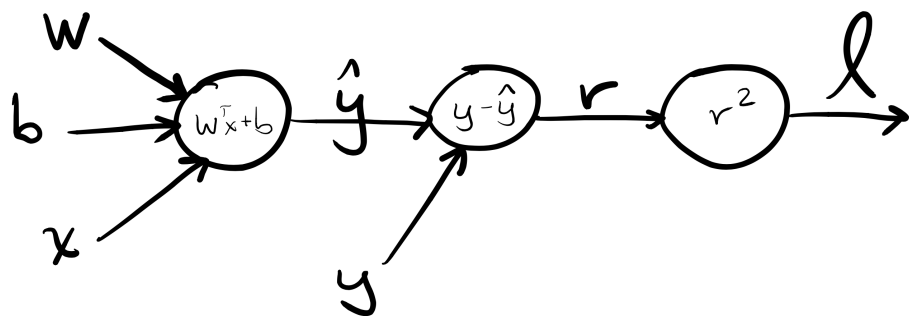

$$\begin{aligned}\frac{\partial \ell}{\partial r} &= 2r \\ \frac{\partial \ell}{\partial \hat{y}} &= \frac{\partial \ell}{\partial r} \frac{\partial r}{\partial \hat{y}} = (2r)(-1) = -2r \\ \frac{\partial \ell}{\partial b} &= \frac{\partial \ell}{\partial \hat{y}} \frac{\partial \hat{y}}{\partial b} = (-2r)(1) = -2r \\ \frac{\partial \ell}{\partial w_j} &= \frac{\partial \ell}{\partial \hat{y}} \frac{\partial \hat{y}}{\partial w_j} = (-2r) x_j = \underline{-2rx_j}\end{aligned}$$

## Example: Ridge Regression

- For training point  $(x, y)$ , the  $\ell_2$ -regularized objective function is

$$J(w, b) = [(w^T x + b) - y]^2 + \lambda w^T w.$$

- Let's break this down into some intermediate computations:

$$\text{(prediction) } \hat{y} = \sum_{j=1}^d w_j x_j + b$$

$$\text{(residual) } r = y - \hat{y}$$

$$\text{(loss) } \ell = r^2$$



## Example: Ridge Regression

- For training point  $(x, y)$ , the  $\ell_2$ -regularized objective function is

$$J(w, b) = [(w^T x + b) - y]^2 + \lambda w^T w.$$

- Let's break this down into some intermediate computations:

$$\text{(prediction) } \hat{y} = \sum_{j=1}^d w_j x_j + b$$

$$\text{(residual) } r = y - \hat{y}$$

$$\text{(loss) } \ell = r^2$$

$$\text{(regularization) } R = \lambda w^T w$$

$$\text{(objective) } J = \underline{\ell} + \underline{R}$$

# Example: Ridge Regression

- For training point  $(x, y)$ , the  $\ell_2$ -regularized objective function is

$$J(w, b) = [(w^T x + b) - y]^2 + \lambda w^T w.$$

- Let's break this down into some intermediate computations:


$$\text{(prediction)} \hat{y} = \sum_{j=1}^d w_j x_j + b$$

$$\text{(residual)} r = y - \hat{y}$$

$$\text{(loss)} \ell = r^2$$


$$\text{(regularization)} R = \lambda w^T w$$

$$\text{(objective)} J = \ell + R$$

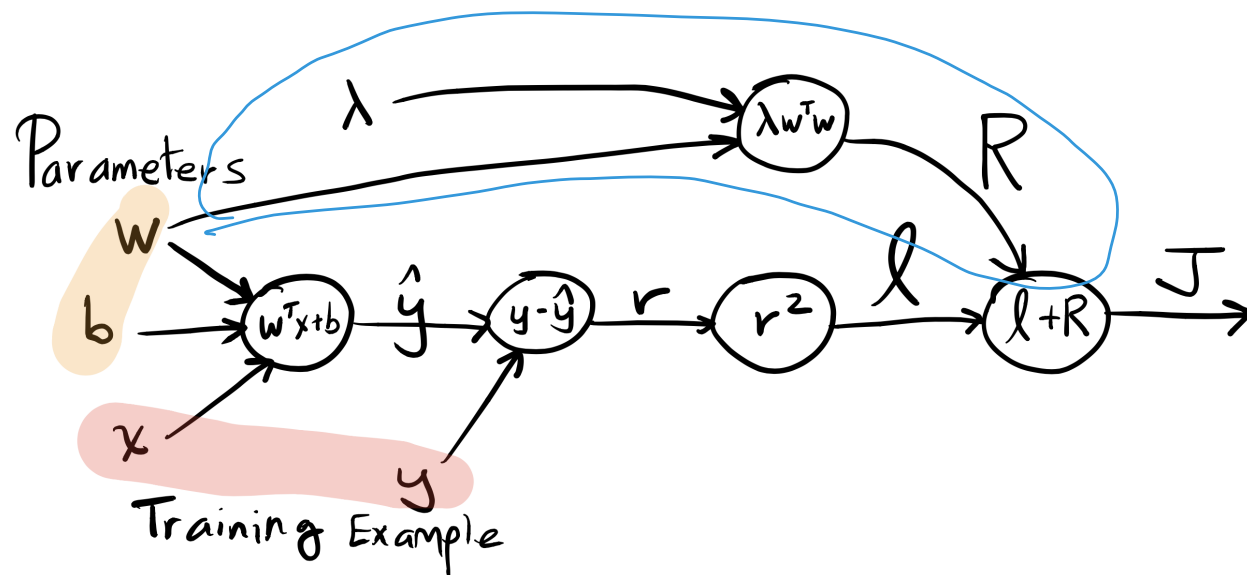

# Partial Derivatives on Computation Graph

- We'll work our way from graph output  $\ell$  back to the parameters  $w$  and  $b$ :

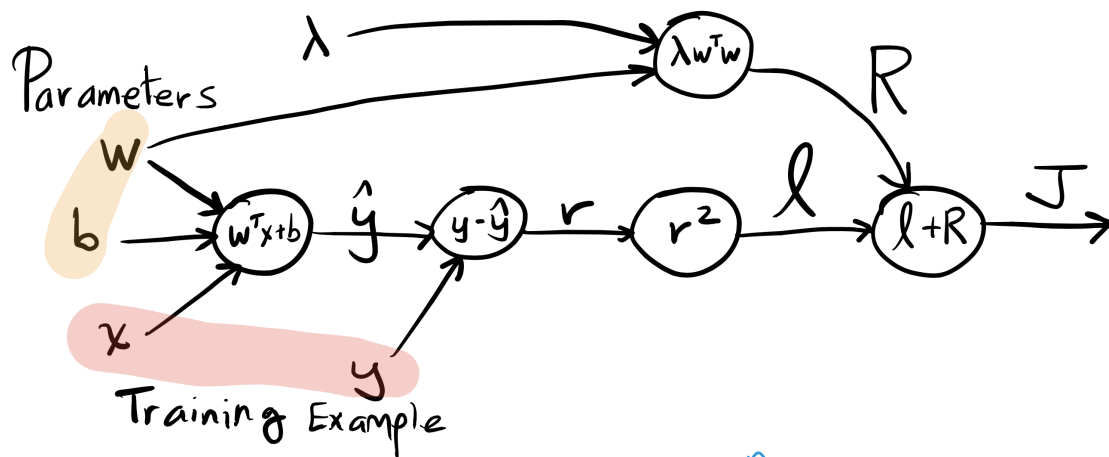


$$\lambda(w^T w) = \lambda \sum_{i=1}^n (w_i)^2$$

$$\begin{aligned} \frac{\partial J}{\partial \ell} &= \frac{\partial J}{\partial R} = 1 \\ \frac{\partial J}{\partial \hat{y}} &= \frac{\partial J}{\partial \ell} \frac{\partial \ell}{\partial r} \frac{\partial r}{\partial \hat{y}} = (1)(2r)(-1) = -2r \\ \frac{\partial J}{\partial b} &= \frac{\partial J}{\partial \hat{y}} \frac{\partial \hat{y}}{\partial b} = (-2r)(1) = -2r \\ \frac{\partial J}{\partial w_j} &= \text{Exercise} \\ &= (-2r)(x_j) + 2\lambda w_j. \end{aligned}$$

# Backpropagation: Overview

- **Learning:** run gradient descent to find the parameters that minimize our objective  $J$ .
- Backpropagation: we compute the gradient w.r.t. each (trainable) parameter  $\frac{\partial J}{\partial \theta_i}$ .

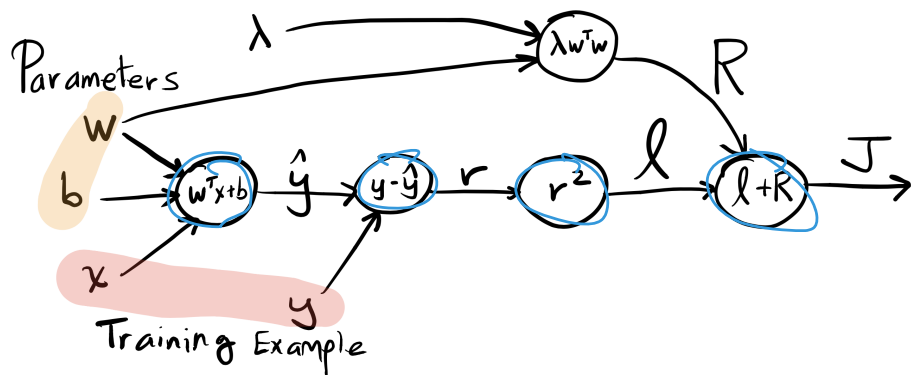


**Forward pass** Compute intermediate function values, i.e. output of each node

**Backward pass** Compute the partial derivative of  $J$  w.r.t. all intermediate variables and the model parameters

How do we minimize computation?

# Backpropagation: Overview

- **Learning:** run gradient descent to find the parameters that minimize our objective  $J$ .
- Backpropagation: we compute the gradient w.r.t. each (trainable) parameter  $\frac{\partial J}{\partial \theta_i}$ .

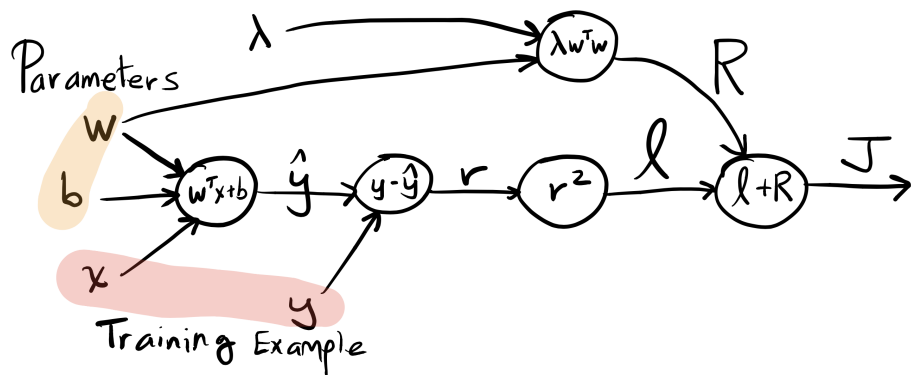

**Forward pass** Compute intermediate function values, i.e. output of each node


**Backward pass** Compute the partial derivative of  $J$  w.r.t. all intermediate variables and the model parameters

How do we minimize computation?

- Path sharing: each node *caches intermediate results*: we don't need to compute them over and over again
- An example of dynamic programming


# Forward pass

- Order nodes by **topological sort** (every node appears before its children)
- For each node, compute the output given the input (output of its parents).
- Forward at intermediate node  $f_i$  and  $f_j$ :

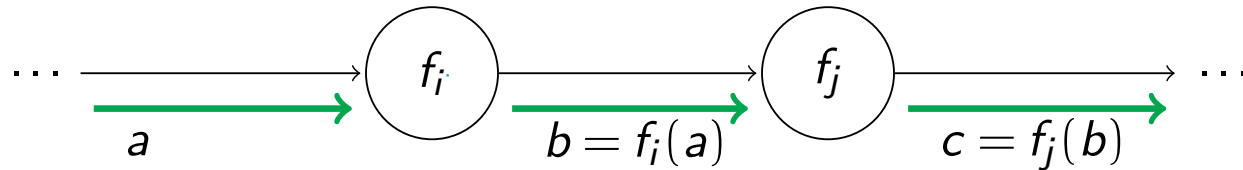


# Backward pass

- Order nodes in **reverse topological order** (every node appears after its children)
- For each node, compute the partial derivative of its output w.r.t. its input, multiplied by the partial derivative of its children (chain rule)
- Backward pass at intermediate node  $f_i$ :

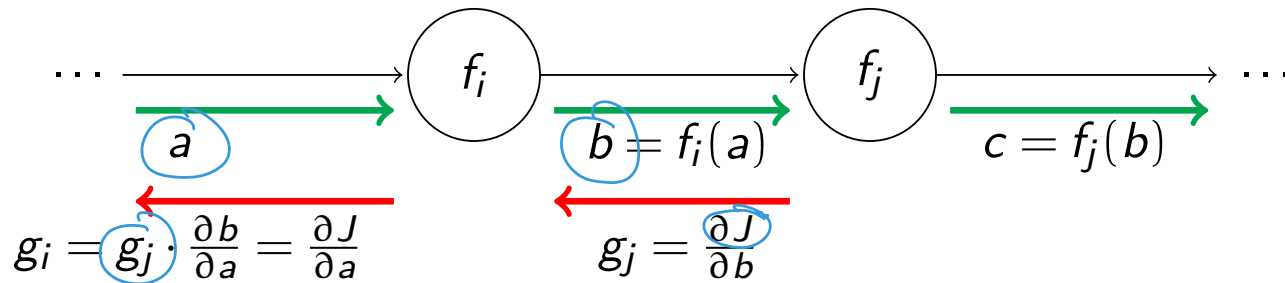

# Multiple children


- First sum partial derivatives from all children, then multiply.

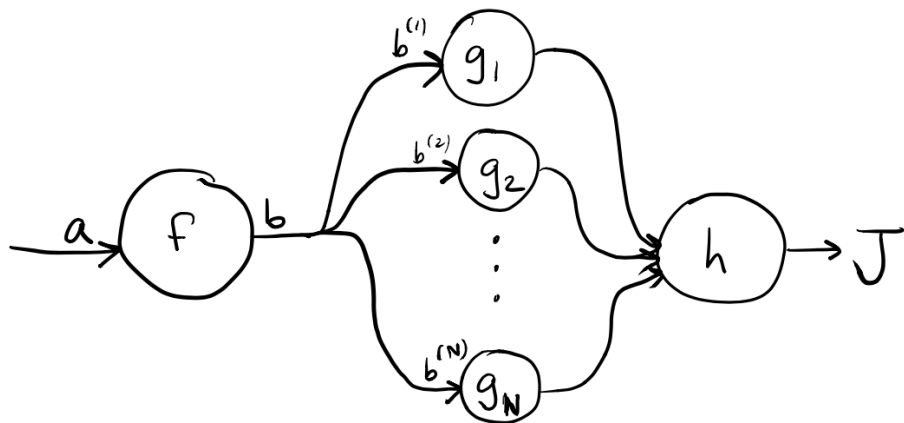



# Multiple children

- First sum partial derivatives from all children, then multiply.

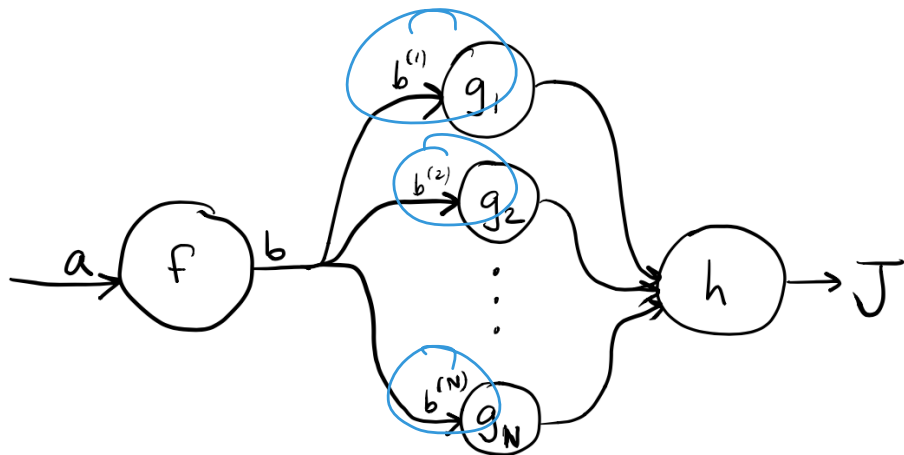

- Backprop for node  $f$ :
- **Input:**  $\frac{\partial J}{\partial b^{(1)}}, \dots, \frac{\partial J}{\partial b^{(N)}}$   
(Partials w.r.t. inputs to all children)
- **Output:**

$$\frac{\partial J}{\partial b} = \sum_{k=1}^N \frac{\partial J}{\partial b^{(k)}}$$
$$\frac{\partial J}{\partial a} = \frac{\partial J}{\partial b} \frac{\partial b}{\partial a}$$

## Why backward?

- We can write the chain rule in different orders of computation.

$$y = y(c(b(a))) \tag{9}$$

(12)

# Why backward?

- We can write the chain rule in different orders of computation.

$$y = y(c(b(a))) \tag{9}$$

$$\frac{\partial y}{\partial a} = \underbrace{\frac{\partial y}{\partial c}}_{D_4 \times D_3} \underbrace{\frac{\partial c}{\partial b}}_{D_3 \times D_2} \underbrace{\frac{\partial b}{\partial a}}_{D_2 \times D_1} \tag{10}$$

(12)

# Why backward?

- We can write the chain rule in different orders of computation.

$$y = y(c(b(a))) \tag{9}$$

$$\frac{\partial y}{\partial a} = \underbrace{\frac{\partial y}{\partial c}}_{D_4 \times D_3} \underbrace{\frac{\partial c}{\partial b}}_{D_3 \times D_2} \underbrace{\frac{\partial b}{\partial a}}_{D_2 \times D_1} \tag{10}$$

Backward:  $\frac{\partial y}{\partial a} = \underbrace{\frac{\partial y}{\partial c} \frac{\partial c}{\partial b}}_{D_4 \times D_3 \cdot D_3 \times D_2 \rightarrow D_4 \times D_2} \underbrace{\frac{\partial b}{\partial a}}_{D_2 \times D_1} \tag{11}$

$$\tag{12}$$

# Why backward?

- We can write the chain rule in different orders of computation.

$$y = y(c(b(a))) \tag{9}$$

$$\frac{\partial y}{\partial a} = \underbrace{\frac{\partial y}{\partial c}}_{D_4 \times D_3} \underbrace{\frac{\partial c}{\partial b}}_{D_3 \times D_2} \underbrace{\frac{\partial b}{\partial a}}_{D_2 \times D_1} \tag{10}$$

Backward:

$$\frac{\partial y}{\partial a} = \underbrace{\frac{\partial y}{\partial c} \frac{\partial c}{\partial b}}_{D_4 \times D_3 \cdot D_3 \times D_2 \rightarrow D_4 \times D_2} \underbrace{\frac{\partial b}{\partial a}}_{D_2 \times D_1} \tag{11}$$

Forward:

$$\frac{\partial y}{\partial a} = \underbrace{\frac{\partial y}{\partial c}}_{D_4 \times D_3} \underbrace{\frac{\partial c}{\partial b} \frac{\partial b}{\partial a}}_{D_3 \times D_2 \cdot D_2 \times D_1 \rightarrow D_3 \times D_1} \tag{12}$$

- The **reverse** order: The **last** dimension ( $D_4$ ) is preserved throughout propagation.

# Trade-offs

- The **reverse** order: The **last** dimension ( $D_4$ ) is preserved throughout propagation.
- The **forward** order: The **first** dimension ( $D_1$ ) is preserved throughout propagation.

# Trade-offs

- The **reverse** order: The **last** dimension ( $D_4$ ) is preserved throughout propagation.
- The **forward** order: The **first** dimension ( $D_1$ ) is preserved throughout propagation.
- Reverse mode automatic differentiation (backprop) is faster since we have a scalar output and a vector input, and it works well on most neural networks.




# Trade-offs

- The **reverse** order: The **last** dimension ( $D_4$ ) is preserved throughout propagation.
- The **forward** order: The **first** dimension ( $D_1$ ) is preserved throughout propagation.
- Reverse mode automatic differentiation (backprop) is faster since we have a scalar output and a vector input, and it works well on most neural networks.
- Forward mode automatic differentiation could be faster if we have a scalar input and a vector output (less memory).


# Trade-offs

- The **reverse** order: The **last** dimension ( $D_4$ ) is preserved throughout propagation.
- The **forward** order: The **first** dimension ( $D_1$ ) is preserved throughout propagation.
- Reverse mode automatic differentiation (backprop) is faster since we have a scalar output and a vector input, and it works well on most neural networks.
- Forward mode automatic differentiation could be faster if we have a scalar input and a vector output (less memory).
- Optimal ordering = matrix chain ordering problem. Dynamic programming solution.

# Non-convex optimization

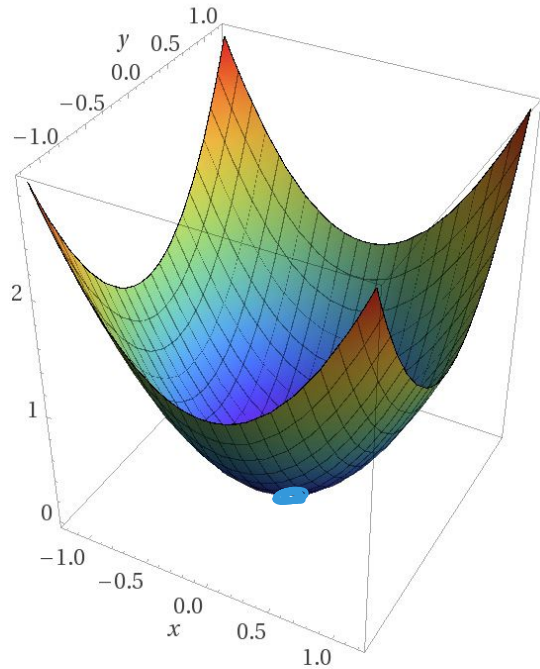

Computed by Wolfram|Alpha

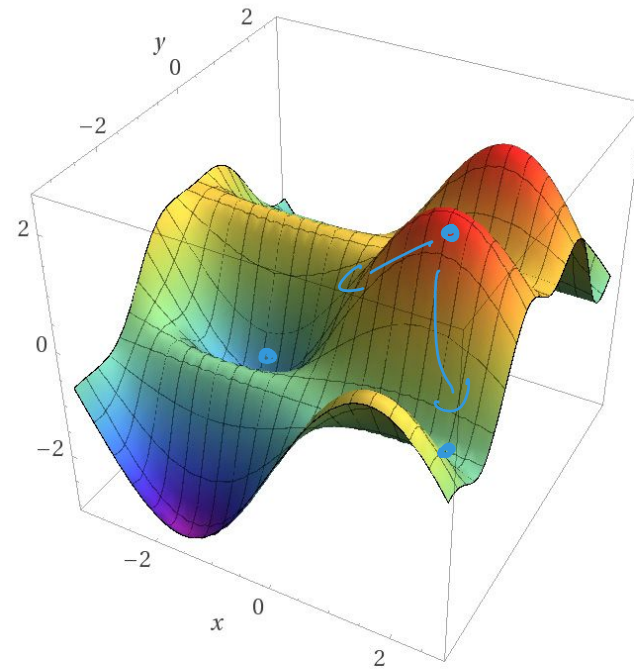


Computed by Wolfram|Alpha

- Left: convex loss function. Right: non-convex loss function.


# Non-convex optimization: challenges

- What if we converge to a bad local minimum?
  - Rerun with a different initialization

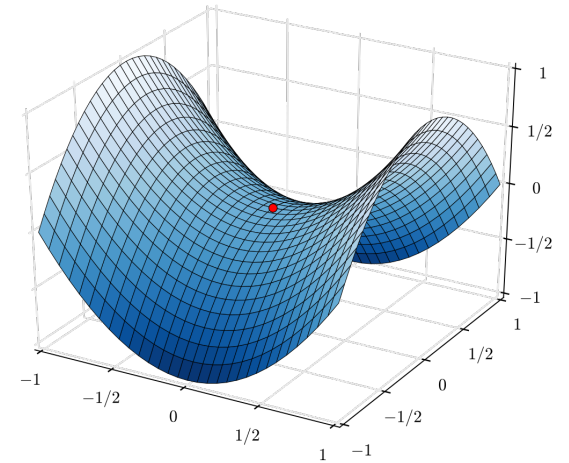

# Non-convex optimization: challenges

- What if we converge to a bad local minimum?
  - Rerun with a different initialization
- Hit a saddle point
  - Doesn't often happen with SGD
  - Second partial derivative test


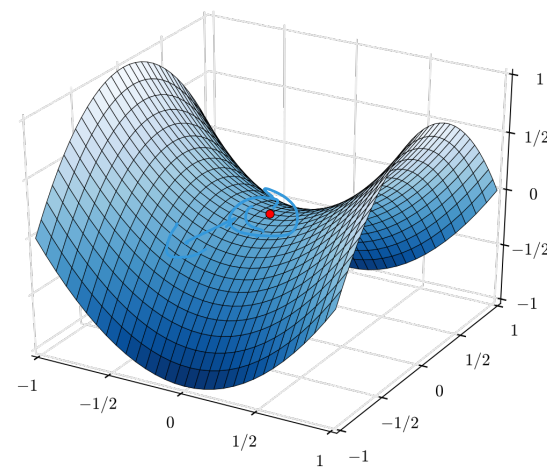


---

Reference: Chris De Sa's slides (CS6787 Lecture 7).


# Non-convex optimization: challenges

- What if we converge to a bad local minimum?
  - Rerun with a different initialization
- Hit a saddle point
  - Doesn't often happen with SGD
  - Second partial derivative test
- Flat region: low gradient magnitude
  - Possible solution: use ReLU instead of sigmoid

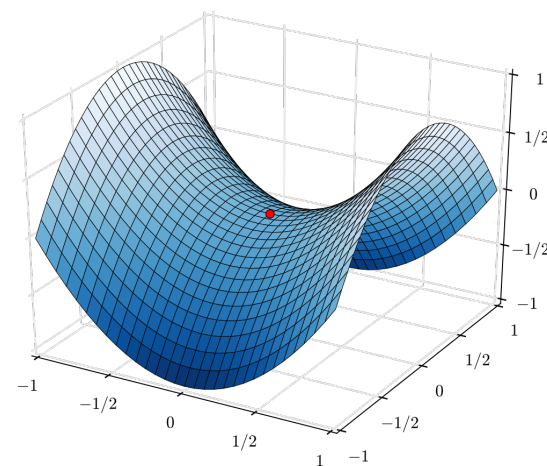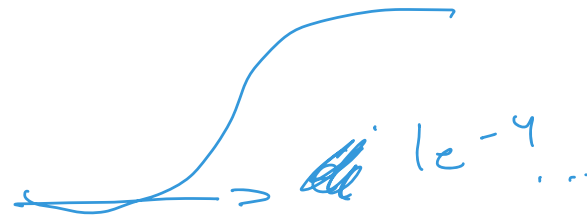

# Non-convex optimization: challenges

- What if we converge to a bad local minimum?
  - Rerun with a different initialization
- Hit a saddle point
  - Doesn't often happen with SGD
  - Second partial derivative test
- Flat region: low gradient magnitude
  - Possible solution: use ReLU instead of sigmoid
- High curvature: large gradient magnitude
  - Possible solutions: Gradient clipping, adaptive step sizes

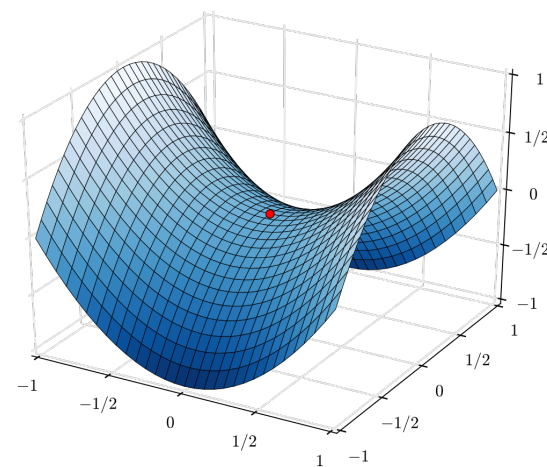

# Learning rate

- One of the most important hyperparameter.
- Start with a higher learning rate then decay towards zero.




# Learning rate

- One of the most important hyperparameter.
- Start with a higher learning rate then decay towards zero.
- Classic theory: convergence guarantee for stochastic gradient descent. Otherwise the update step has a noise term dominated by the noise of data sample.
- Other explanation: Loss surface, avoidance of local minima, avoidance of memorization of noisy samples

# Learning rate

- One of the most important hyperparameter.
- Start with a higher learning rate then decay towards zero.
- Classic theory: convergence guarantee for stochastic gradient descent. Otherwise the update step has a noise term dominated by the noise of data sample.
- Other explanation: Loss surface, avoidance of local minima, avoidance of memorization of noisy samples
- Learning rate decay (staircase 10x, cosine, etc.), speeds up convergence

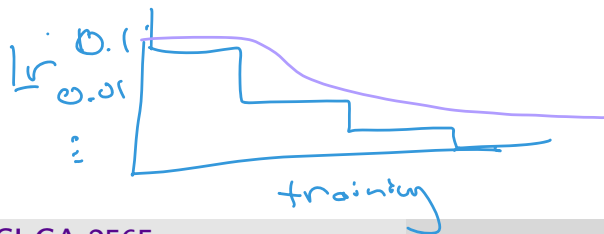

- Backprop is used to train the overwhelming majority of neural nets today.

# Biological Plausibility

- Backprop is used to train the overwhelming majority of neural nets today.
- Despite its practical success, backprop is believed to be neurally implausible.

# Biological Plausibility


- Backprop is used to train the overwhelming majority of neural nets today.
- Despite its practical success, backprop is believed to be neurally implausible.
- No evidence for biological signals analogous to error derivatives.

# Biological Plausibility

- Backprop is used to train the overwhelming majority of neural nets today.
- Despite its practical success, backprop is believed to be neurally implausible.
- No evidence for biological signals analogous to error derivatives.
- Two main problems with implementing in an asynchronous analog hardware like our brain.


# Biological Plausibility

## 1) Weight Symmetry & Network Symmetry

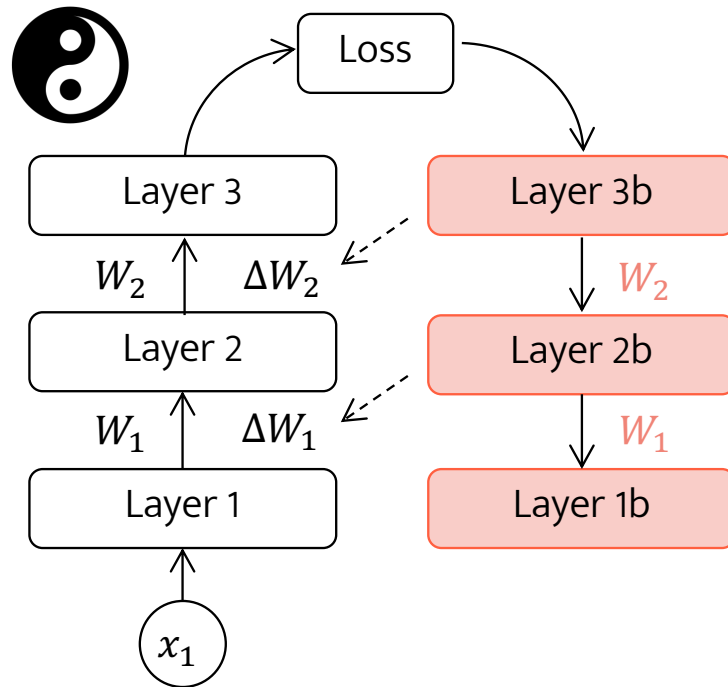


# Biological Plausibility

1) Weight Symmetry & Network Symmetry

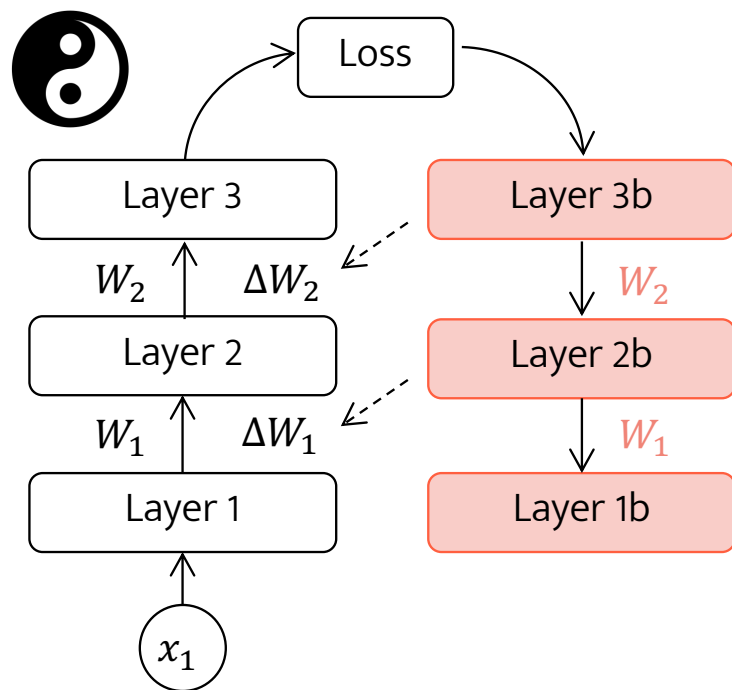

2) Global Synchronization

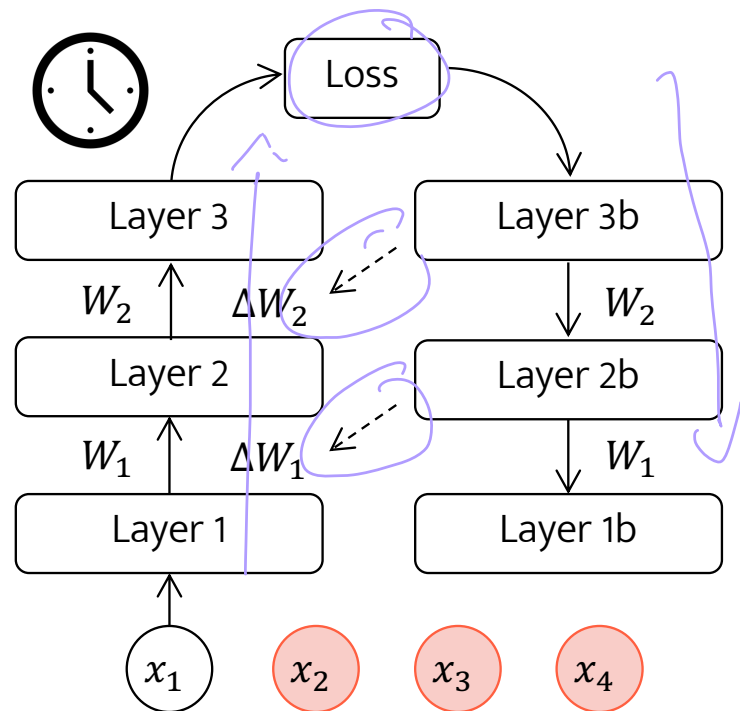



- Backpropagation is an algorithm for computing the gradient (partial derivatives + chain rule) efficiently.

- Backpropagation is an algorithm for computing the gradient (partial derivatives + chain rule) efficiently.
- It is used in gradient descent optimization for neural networks.

- Backpropagation is an algorithm for computing the gradient (partial derivatives + chain rule) efficiently.
- It is used in gradient descent optimization for neural networks.
- Key idea: function composition and the chain rule

# Review

- Backpropagation is an algorithm for computing the gradient (partial derivatives + chain rule) efficiently.
- It is used in gradient descent optimization for neural networks.
- Key idea: function composition and the chain rule
- In practice, we can use existing software packages, e.g. PyTorch (backpropagation, neural network building blocks, optimization algorithms etc.)

SGD, learning rate schedules


# Applying Neural Networks on Images

- Neural networks are widely used on images today.
- Images are challenging to deal with because of its large dimensions.

$$\frac{224 \times 224}{\text{---}} \times 3 \quad (\text{RGB})$$
$$= 150k$$


# Applying Neural Networks on Images

- Neural networks are widely used on images today.
- Images are challenging to deal with because of its large dimensions.
- Stored the intensity value pixel by pixel.
- A  $28 \times 28$  image of digit 4:

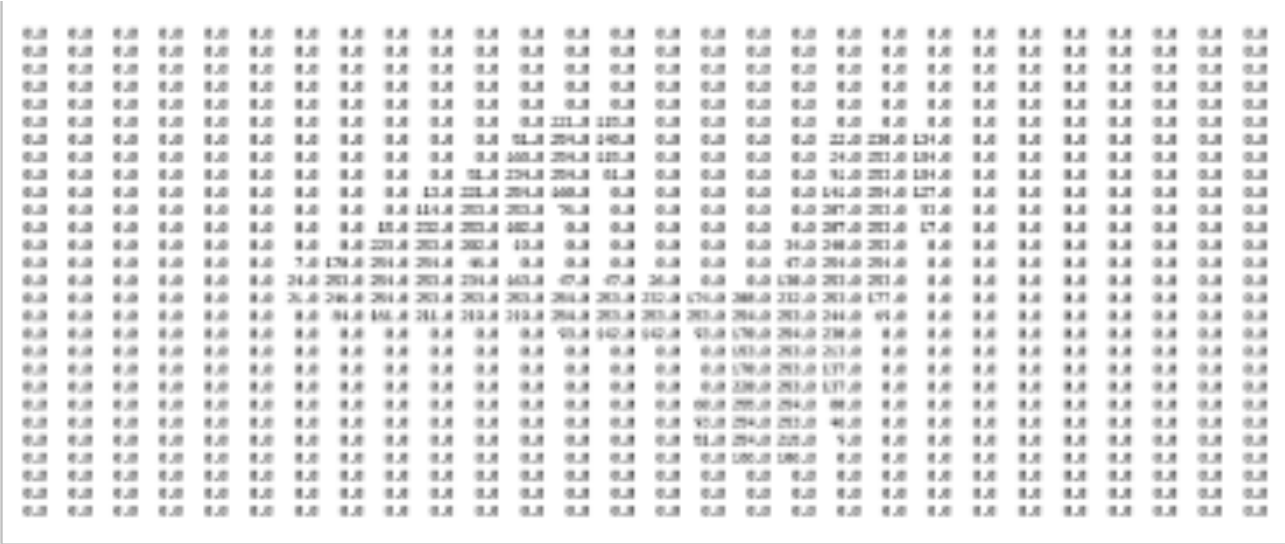


# Fully connected vs. locally connected

- So far we apply a layer where all output neurons are connected to all input neurons.
- In matrix form,  $z = Wx$ .
- This is also called a fully connected layer or a dense layer or a linear layer.

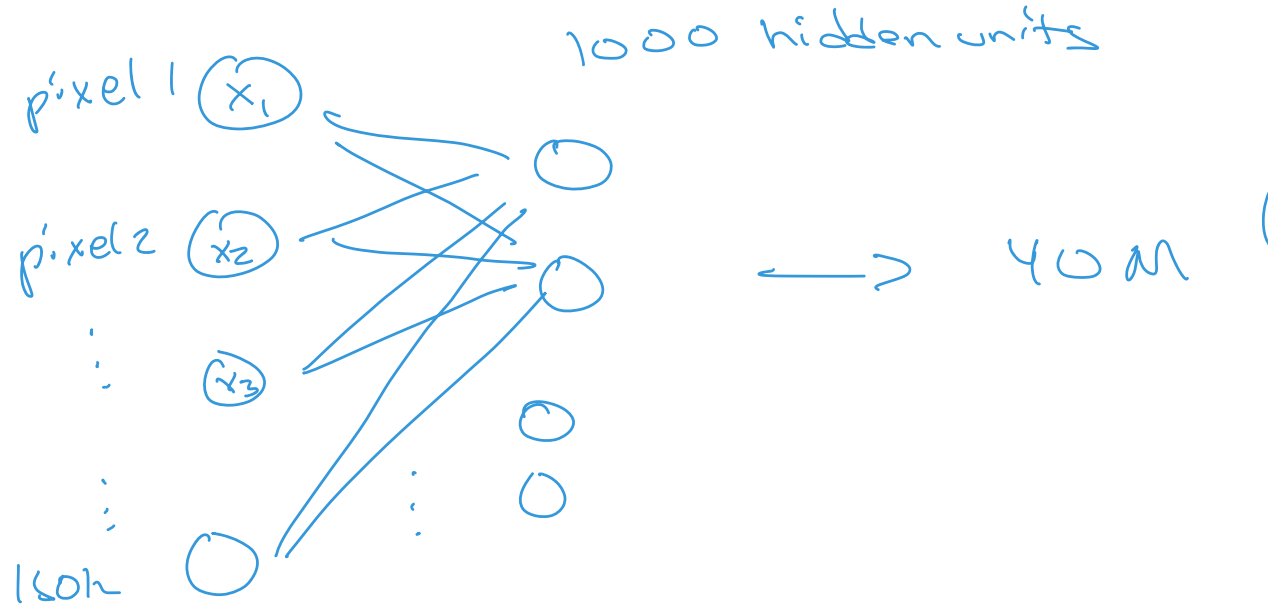

# Fully connected vs. locally connected



- So far we apply a layer where all output neurons are connected to all input neurons.
- In matrix form,  $z = Wx$ .
- This is also called a fully connected layer or a dense layer or a linear layer.
- For  $200 \times 200$  image and 1000 hidden units, the matrix of a single layer will have 40M parameters!

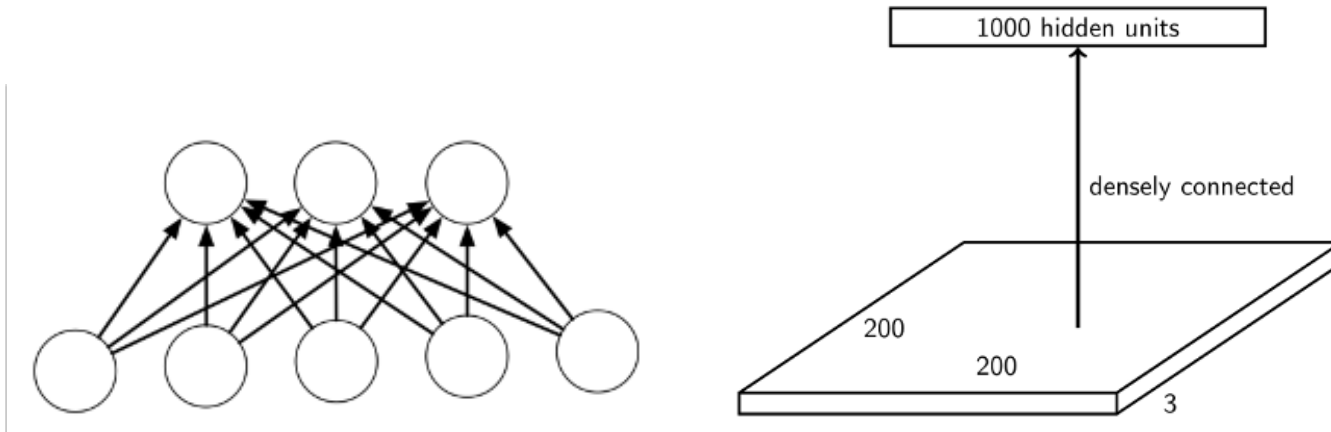




# Fully connected vs. locally connected

- An alternative strategy is to use local connection.
- For neuron  $i$ , only connects to its neighborhood (e.g.  $[i+k, i-k]$ )
- For images, we index neurons with three dimensions  $i$ ,  $j$ , and  $c$ .
- $i$  = vertical index,  $j$  = horizontal index,  $c$  = channel index.

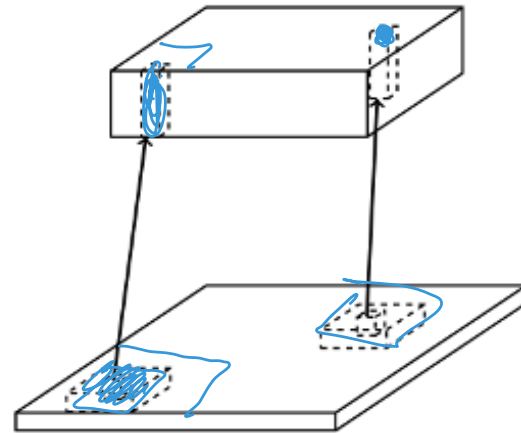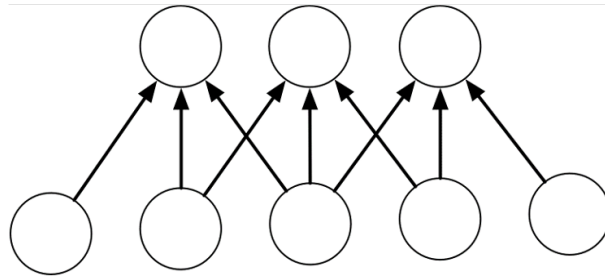

# Local connection patterns


- The typical image input layer has 3 channels R G B for color or 1 channel for grayscale.
- The hidden layers may have  $C$  channels, at each spatial location  $(i, j)$ .

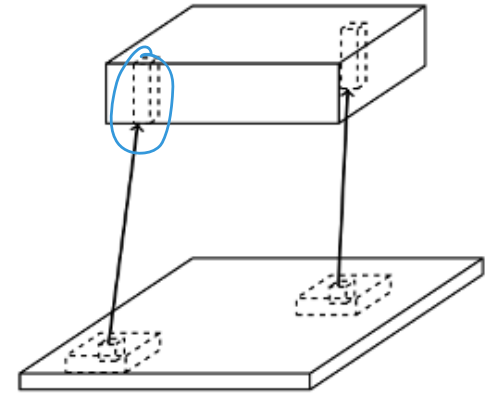

# Local connection patterns

- The typical image input layer has 3 channels R G B for color or 1 channel for grayscale.
- The hidden layers may have  $C$  channels, at each spatial location  $(i, j)$ .
- Now each hidden neuron  $z_{i,j,c}$  receives inputs from  $x_{i\pm k, j\pm k, \cdot}$ .
- $k$  is the “kernel” size - do not confuse with the other kernel we learned.

- $z_{i,j,c} = \sum_{i' \in [i\pm k], j' \in [j\pm k], c'} x_{i'j'c'} W_{i,j,i'-i,j'-j,c',c}$

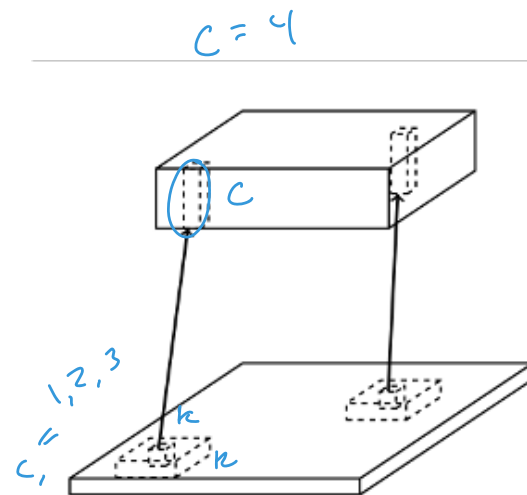

# Local connection patterns

- The typical image input layer has 3 channels R G B for color or 1 channel for grayscale.
- The hidden layers may have  $C$  channels, at each spatial location  $(i, j)$ .
- Now each hidden neuron  $z_{i,j,c}$  receives inputs from  $x_{i\pm k, j\pm k, \cdot}$ .
- $k$  is the “kernel” size - do not confuse with the other kernel we learned.
- $$z_{i,j,c} = \sum_{i' \in [i\pm k], j' \in [j\pm k], c'} x_{i'j'c'} W_{i,j,i'-i,j'-j,c',c}$$
- The spatial awareness (receptive field) of the neighborhood grows bigger as we go deeper.

